



# LED Display

## Product Data Sheet

### LTD-5623AJG

Spec No.: DS30-2001-382

Effective Date: 03/07/2013

Revision: A

**LITE-ON DCC**

**RELEASE**

# LED DISPLAY

## LTD-5623AJG DATA SHEET

Rev	Description	By
-	Original Spec	Ruby Lee November 17, 2001
A	Add cosmetic Spec	Phanomkorn July 27, 2012

SPEC NO. : DS30-2001-382  
 DATE : July 27, 2012  
 REV. NO. : 01  
 PAGE NO. : 0 OF 5  
 CUSTOMER APPROVAL :  
 DATE :

**LITEON** LITE-ON TECHNOLOGY CORPORATION  
 Property of Lite-On Only

**LED DISPLAY**

**LTD-5623AJG**  
**DATA SHEET**

Rev	Description	By
-	Original Spec	Ruby Lee November 17, 2001
A	Add cosmetic Spec	Phanomkorn July 27, 2012

SPEC NO. :  
 DATE : July 27, 2012  
 REV. NO. : 01  
 PAGE NO. : 0 OF 5  
 CUSTOMER APPROVAL :  
 DATE :

(Signature)

PART NO.: LTD-5623AJG PAGE: 0 of 5  
 BNS-OD-C131/A4

## FEATURES

- \* 0.56 inch (14.22 mm) DIGIT HEIGHT.
- \* CONTINUOUS UNIFORM SEGMENTS.
- \* LOW POWER REQUIREMENT.
- \* EXCELLENT CHARACTERS APPEARANCE.
- \* HIGH BRIGHTNESS & HIGH CONTRAST.
- \* WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.
- \* LEAD-FREE PACKAGE (ACCORDING TO ROHS)


## DESCRIPTION

The LTD-5623AJG is a 0.56 inch (14.22 mm) digit height dual digit seven-segment display. This device utilizes AllnGaP Green LED chips, which are made from AllnGaP on a non-transparent GaAs substrate, and has a gray face and green segments.



## DEVICE

PART NO.	DESCRIPTION
AllnGaP Green	Common Cathode Rt. Hand Decimal
LTD-5623AJG	

**PACKAGE DIMENSIONS**

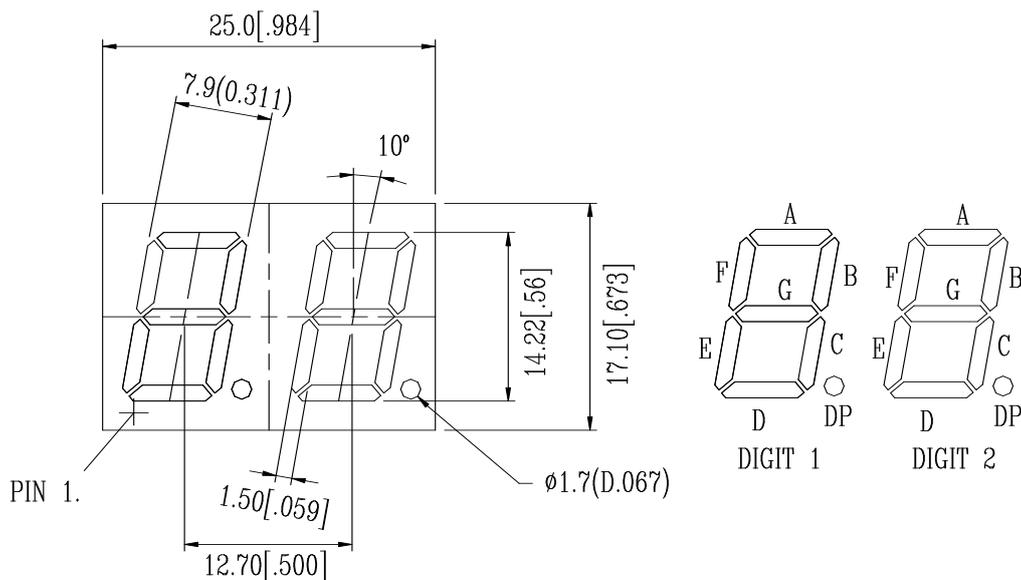


PART NO.  
DATE CODE  
BIN CODE

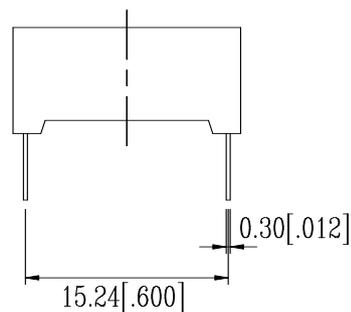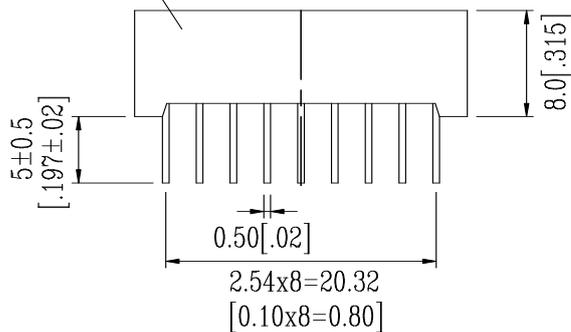

**NOTES:**

1. All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm (0.01") unless otherwise noted.
2. Pin tip's shift tolerance is  $\pm 0.4$  mm.
3. Recommend the best PCB hole:  $\text{Ø}1.0$ mm
4. Foreign material on segment  $\cong 10$ mils
5. Ink contamination (surface)  $\cong 20$ mils
6. Bending  $\cong 1/100$
7. Bubble in segment  $\cong 10$ mils

### INTERNAL CIRCUIT DIAGRAM

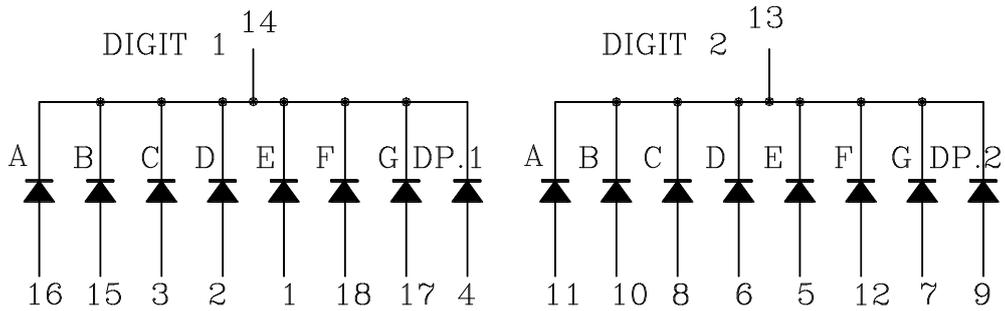

### PIN CONNECTION

No	CONNECTION
1	ANODE E (DIGIT 1)
2	ANODE D (DIGIT 1)
3	ANODE C (DIGIT 1)
4	ANODE D.P. (DIGIT 1)
5	ANODE E (DIGIT 2)
6	ANODE D (DIGIT 2)
7	ANODE G (DIGIT 2)
8	ANODE C (DIGIT 2)
9	ANODE D.P. (DIGIT 2)
10	ANODE B (DIGIT 2)
11	ANODE A (DIGIT 2)
12	ANODE F (DIGIT 2)
13	COMMON CATHODE (DIGIT 2)
14	COMMON CATHODE (DIGIT 1)
15	ANODE B (DIGIT 1)
16	ANODE A (DIGIT 1)
17	ANODE G (DIGIT 1)
18	ANODE F (DIGIT 1)

**ABSOLUTE MAXIMUM RATING AT Ta=25°C**

<b>PARAMETER</b>	<b>MAXIMUM RATING</b>	<b>UNIT</b>
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment ( 1/10 Duty Cycle, 0.1ms Pulse Width )	60	mA
Continuous Forward Current Per Segment	25	mA
Derating Linear From 25°C Per Segment	0.28	mA/°C
Reverse Voltage Per Segment	5	V
Operating Temperature Range	-35°C to +105°C	
Storage Temperature Range	-35°C to +105°C	
Soldering Conditions : 1/16 inch below seating plane for 3 seconds at 260 <sup>0</sup> C or of temperature unit (during assembly) not over max. temperature rating.		

**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C**






<b>PARAMETER</b>	<b>SYMBOL</b>	<b>MIN.</b>	<b>TYP.</b>	<b>MAX.</b>	<b>UNIT</b>	<b>TEST CONDITION</b>
Average Luminous Intensity	I <sub>v</sub>	320	900		μcd	I <sub>F</sub> =1mA
Peak Emission Wavelength	λ <sub>p</sub>		571		nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ		15		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>		572		nm	I <sub>F</sub> =20mA
Forward Voltage Per Segment	V <sub>F</sub>		2.05	2.6	V	I <sub>F</sub> =20mA
Reverse Current Per Segment	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Ratio (Similar Light Area)	I <sub>v</sub> -m			2:1		I <sub>F</sub> =1mA

**NOTES:**

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.
- Cross talk specification ≅ 2.5%
- Reverse voltage is only for IR test. It cannot continue to operate at this situation.

# TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

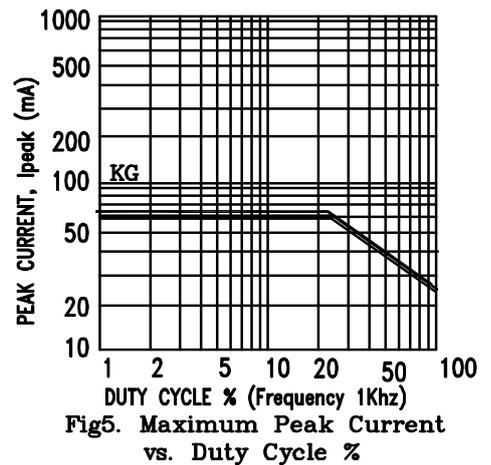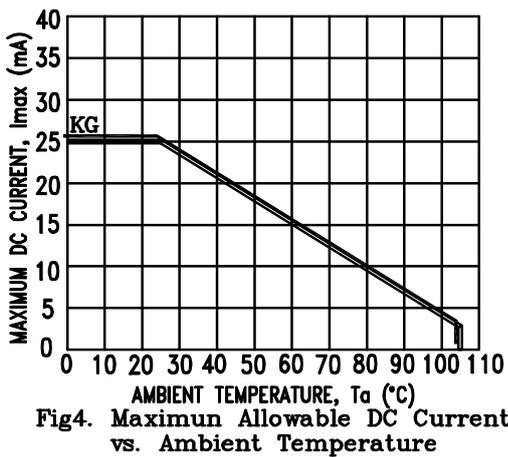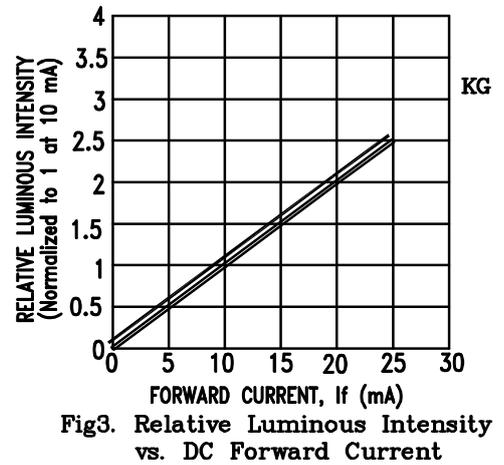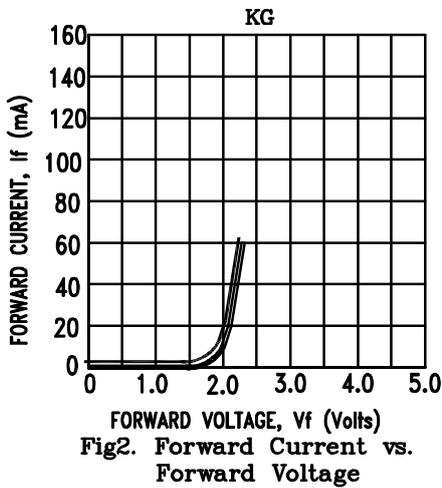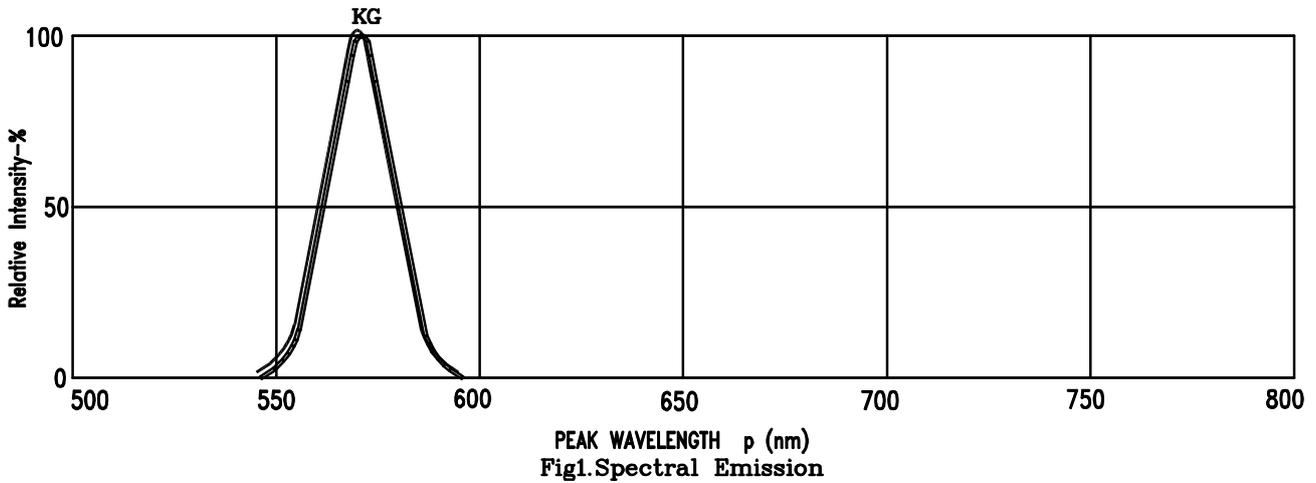

NOTE : KG=AlInGaP Green