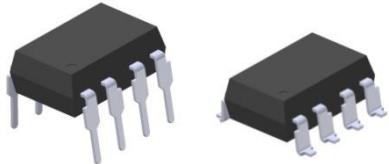



GENERAL PURPOSE SOLID STATE RELAY 8PIN DIP 2-CHANNEL TYPE FORM A SSR Series

**Schematic****Pin Configuration**

- 1, 3 LED Anode
- 2, 4 LED Cathode
- 8, 7, 6, 5 MOSFET

Features

- Compact 8-pin DIP size
- Applicable for 2 Form A use as well as two independent 1 Form A use
- Controls low-level analog signals
- High sensitivity and high speed response
- Low-level off state leakage current of max. 1uA
- Wide operating temperature range of -40°C to 85°C
- High isolation voltage between input and output ($V_{iso} = 5000$ Vrms)
- UL 1577 + cUL approved (No. E214129)
- VDE approved (No. 40028391)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

Description

The EL840A and EL860A are solid state relays containing an AlGaAs infrared LEDs on the light emitting side (input side) optically coupled to a high voltage output detector circuit. The detector consists of a photovoltaic diode array and MOSFETs on the output side. The dual channel configuration is equivalent to 1 form A EMR. They are packaged in 8 pin DIP and available in surface mount SMD option.

Applications

- High-speed inspection machines
- Telephones equipment
- Computer

Absolute Maximum Ratings (T_A=25 °C, unless otherwise specified)

Parameter		Symbol	Rating		Unit
			EL840A	EL860A	
Input	Forward Current	I _F	50		mA
	Reverse Voltage	V _R	5		V
	Peak Forward Current* ¹	I _{FP}	1		A
	Power Dissipation	P _{in}	75		mW
Output	Break Down Voltage* ²	V _L	400	600	V
	Continuous Load Current* ²	I _L	120	50	mA
	Pulse Load Current* ³	I _{LPeak}	0.3	0.15	A
	Power Dissipation	P _{out}	800		mW
Total Power Dissipation		P _T	850		mW
Isolation Voltage* ⁴		V _{iso}	5000		Vrms
Storage Temperature		T _{STG}	-40 to 125		°C
Operating Temperature		T _{OPR}	-40 to 85		°C
Soldering Temperature* ⁵		T _{SOL}	260		°C

Notes:

*1. f =100Hz, Duty Cycle = 0.1%

*2. Indicate the peak AC and DC values

*3.A connection: 100ms (1 shot), V_L = DC or Peak AC


*4.AC for 1 minute, R.H. = 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

*5.For 10 seconds

Electro-Optical Characteristics ($T_A=25^\circ\text{C}$)

	Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	$I_F = 10\text{mA}$	-	1.18	1.5	V
	Reverse Current	I_R	$V_R = 5\text{V}$	-	-	1	μA
	Off State leakage Current	I_{leak}	$I_F = 0\text{mA}, V_L = \text{Max.}$	-	-	1	μA
Output	On Resistance	$R_{d(\text{ON})}$	$I_F = 10\text{mA}, I_L = \text{Max.}$ $t = 1\text{s}$	-	20	30	Ω
	EL840A			-	40	70	
	EL860A			-	30	-	
Transfer Characteristics	Output Capacitance	C_{out}	$V_L = 0\text{V}, f = 1\text{MHz}$	-	45	-	pF
	EL840A			-	30	-	
	EL860A			-	3.0	5	mA
Transfer Characteristics	LED turn on Current	$I_{F(\text{on})}$	$I_L = \text{Max.}$	-	3.0	5	mA
	EL840A			-	3.0	5	
	EL860A			0.4	3.0	-	mA
Transfer Characteristics	LED turn off current	$I_{F(\text{off})}$	$I_L = \text{Max.}$	0.4	3.0	-	mA
	EL840A			0.4	3.0	-	
	EL860A			-	0.4	3	ms
Transfer Characteristics	Turn On Time	T_{on}	$I_F = 10\text{ mA}, I_L = \text{Max.}$	-	1.4	3	ms
	EL840A			-	0.05	0.5	
	EL860A			-	0.05	0.5	ms
Isolation	Isolation Resistance	R_{I-O}	$V_{I-O} = 500\text{V DC}$	5×10^{10}	-	-	Ω
	Resistive						
	Isolation Capacitance	C_{I-O}	$V = 0\text{V}, f = 1\text{MHz}$	1.5	-	-	pF

Turn on/Turn off Time

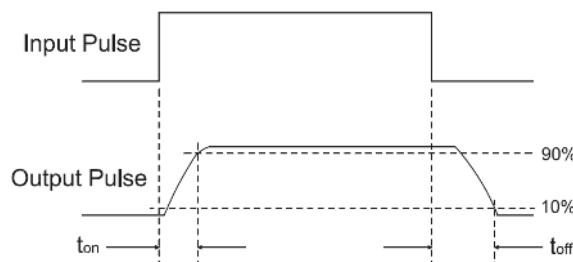

Typical Electro-Optical Characteristics Curves

Figure 1. Load current vs Ambient temperature

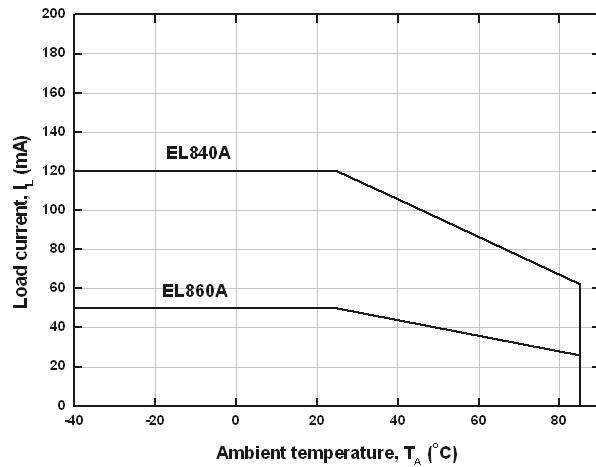


Figure 2. On Resistance vs Ambient Temperature

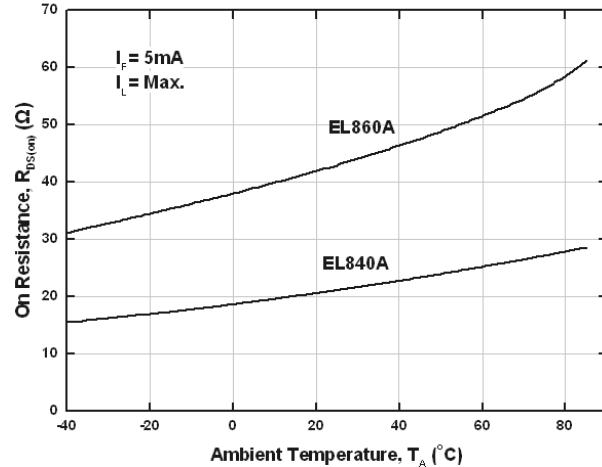


Figure 3. Switching Time vs Ambient Temperature

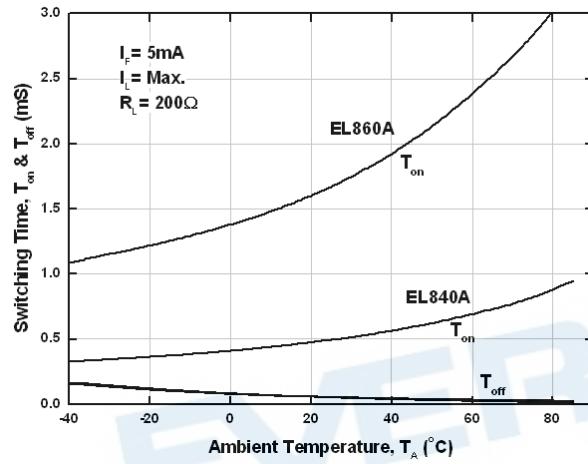


Figure 4. Turn On Time vs LED Forward Current

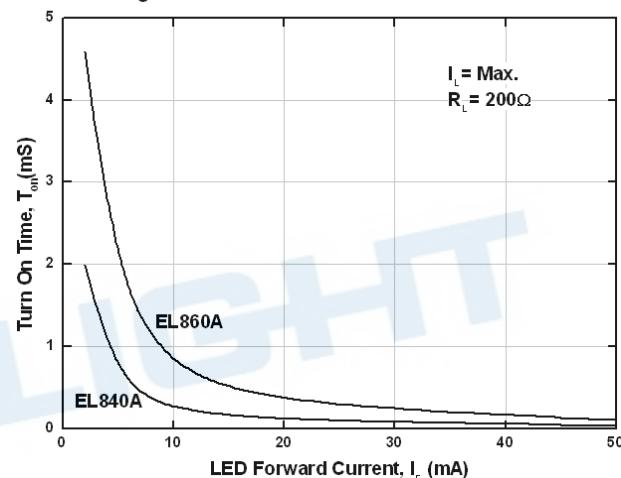


Figure 5. Turn Off Time vs LED Forward Current

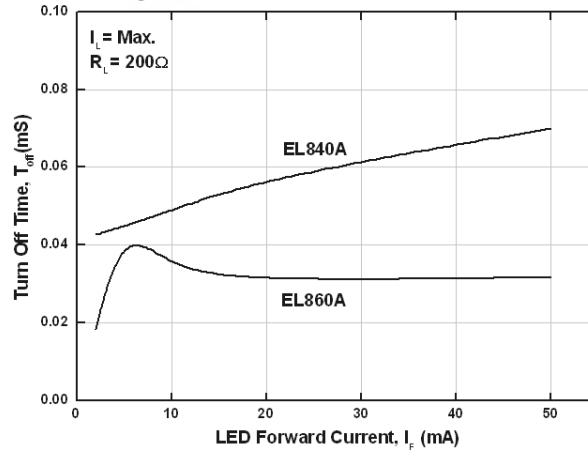


Figure 6. LED Operate on Current vs Ambient Temperature

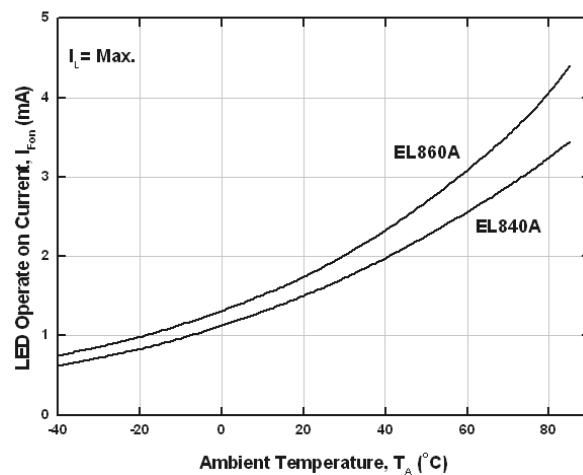


Figure 7. LED Turn off Current vs Ambient Temperature

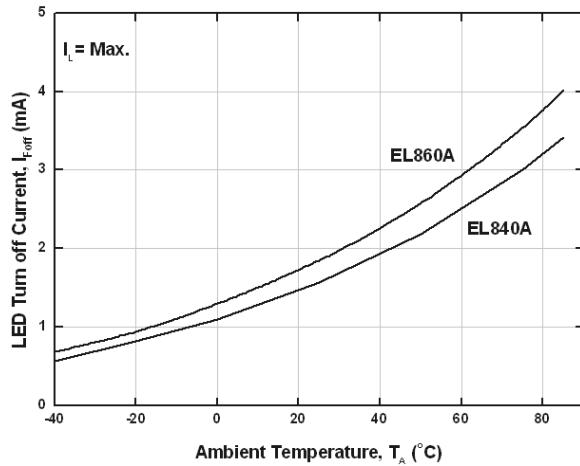


Figure 8. LED Dropout Voltage vs Ambient Temperature

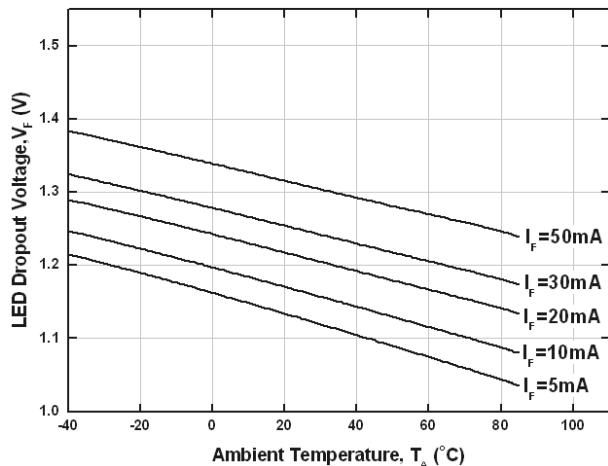


Figure 9. Load Voltage vs Load Current

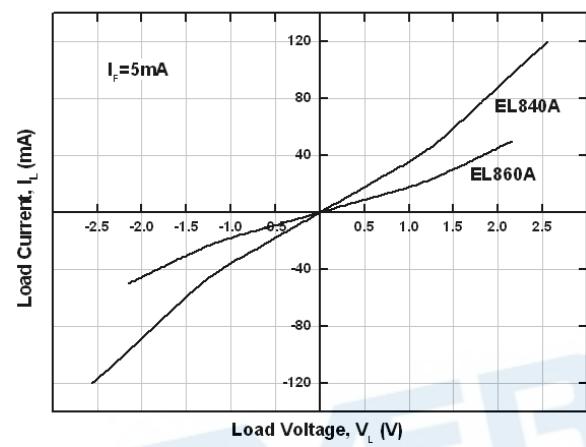


Figure 10. Off State Leakage Current vs Load Voltage


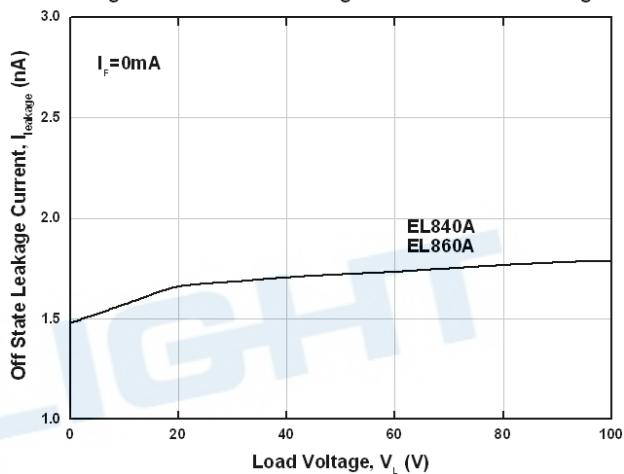


Figure 11. Applied Voltage VS Output Capacitance

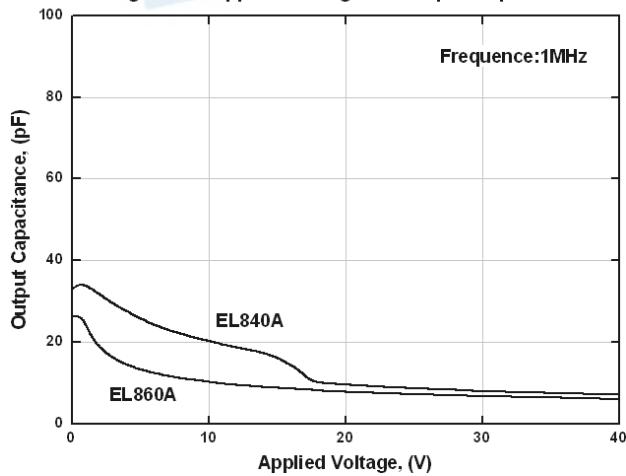

Order Information

Part Number

EL8XXA(Y)(Z)-V

Note:

XX = Part No. (40 or 60)

Y = Lead form option (S1, or none)




Z = Tape and reel option (TA, TB, TU, TD or none).

V = VDE safety approved option




Option	Description	Packing quantity
None	Standard DIP-8	45 units per tube
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel

Package Dimension (Dimensions in mm)


Standard DIP Type

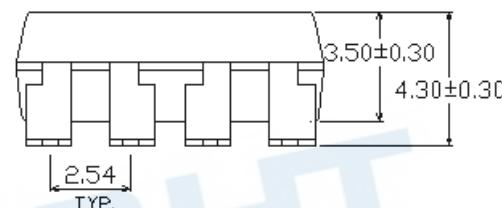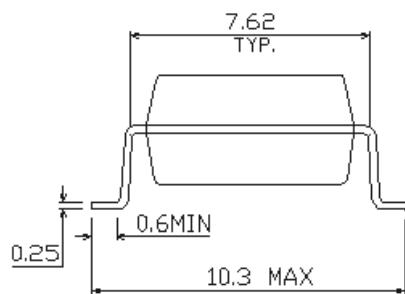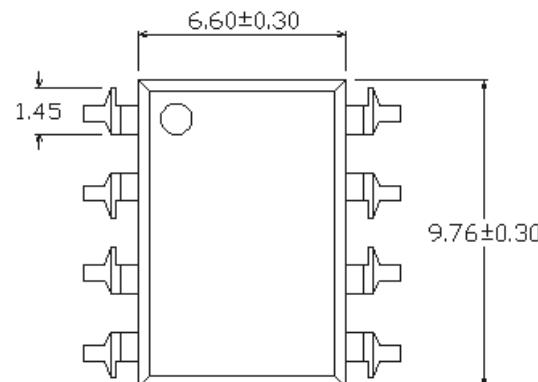


Option S1 Type

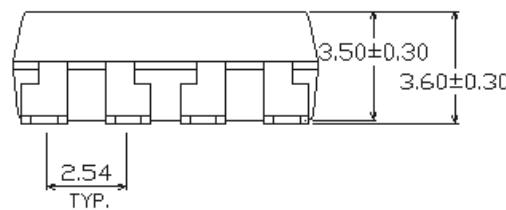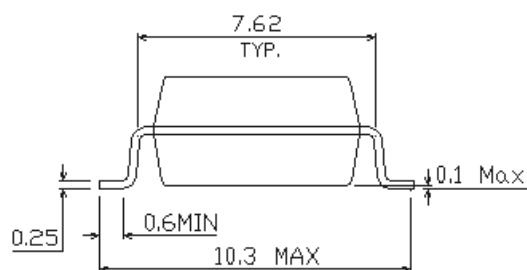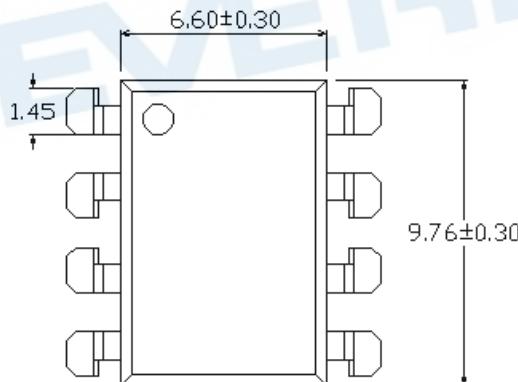

Recommended Pad Layout for Surface Mount Leadform

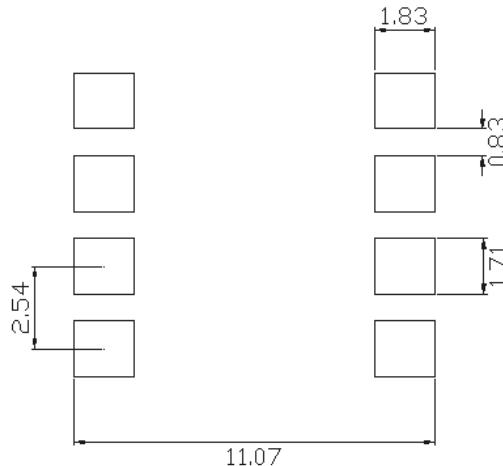

Device Marking


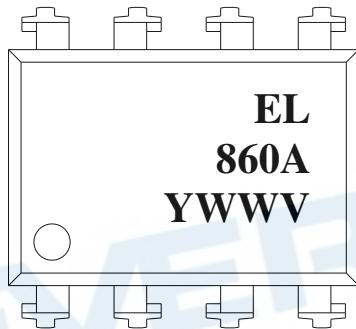


Notes

EL	denotes Everlight
860A	denotes Part Number
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE option



Tape & Reel Packing Specifications

Option TA

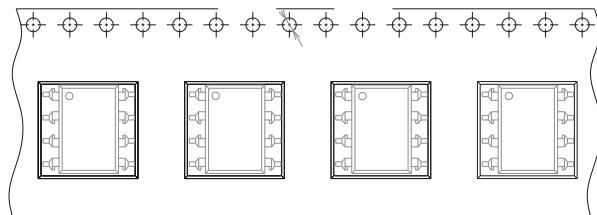


Direction of feed from reel

Option TB

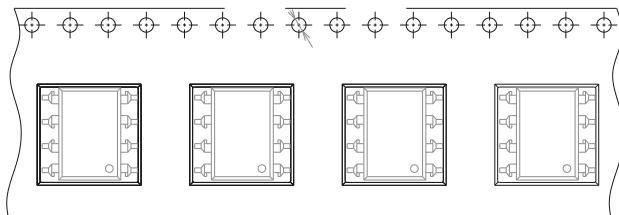

Direction of feed from reel

Tape Dimensions

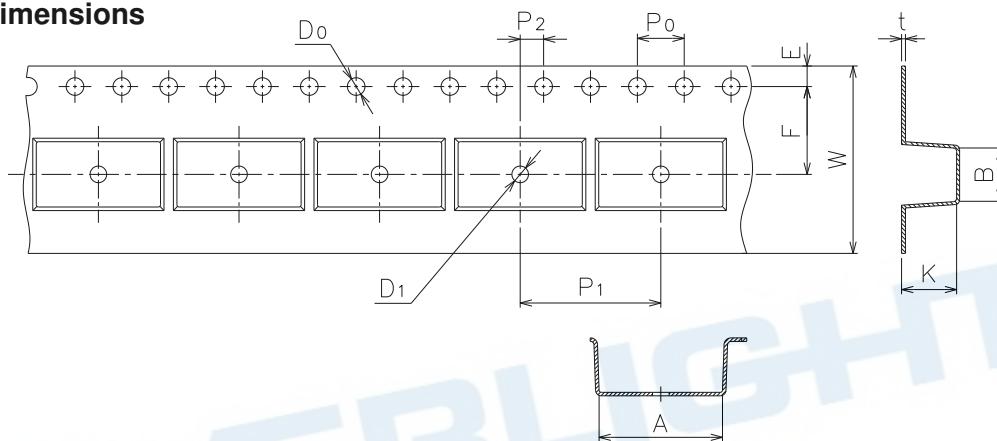


Dimension No.	A	B	D ₀	D ₁	E	F
Dimension(mm)	10.4±0.1	10.0±0.1	1.5+0.1/-0	1.5±0.25/-0	1.75±0.1	7.5±0.1
Dimension No.	P ₀	P ₁	P ₂	t	W	K
Dimension(mm)	4.0±0.1	12.0±0.1	2.0±0.05	0.4±0.05	16.0±0.3/	4.5±0.1

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

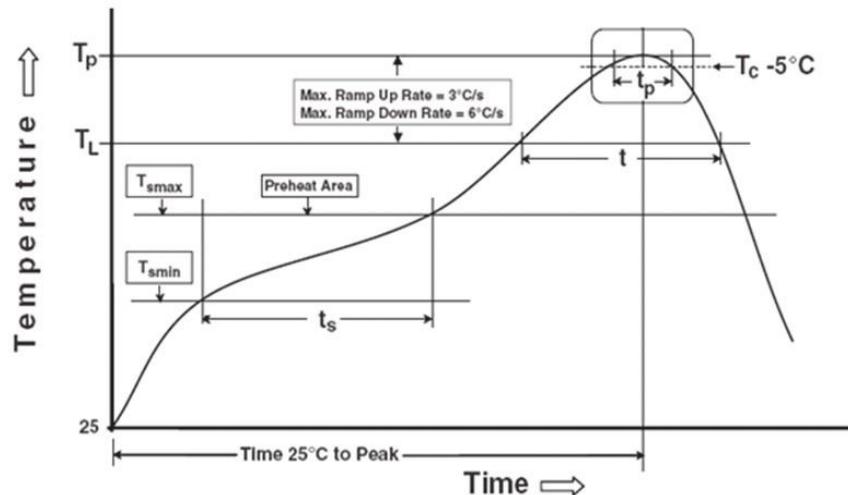

Note:

Reference: IPC/JEDEC J-STD-020D

Preheat

Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max

Other

Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_p)	260°C
Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material changes to above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of this product which does not comply with the absolute maximum ratings and the instructions included in the specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life safety applications or any other application which can result in human injury or death. Please contact author or Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets are general specifications and may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.