


Technical Data Sheet

4mm Infrared LED , T-1 3/4

IR3494-30C/H80/L419

Features

- High reliability
- High radiant intensity
- Peak wavelength $\lambda_p=940\text{nm}$
- 2.54mm Lead spacing
- Low forward voltage
- Pb free
- The product itself will remain within RoHS compliant version.

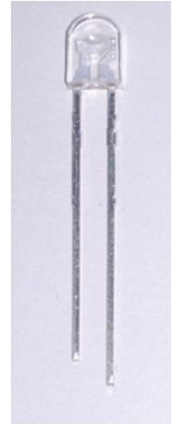


Descriptions

- EVERLIGHT'S Infrared Emitting Diode(IR3494-30C/H80/L419) is a high intensity diode , molded in a water clear plastic package.
- The device is spectrally matched with phototransistor , photodiode and infrared receiver module.

Applications

- Free air transmission system
- Infrared remote control units with high power requirement
- Smoke detector
- Infrared applied system

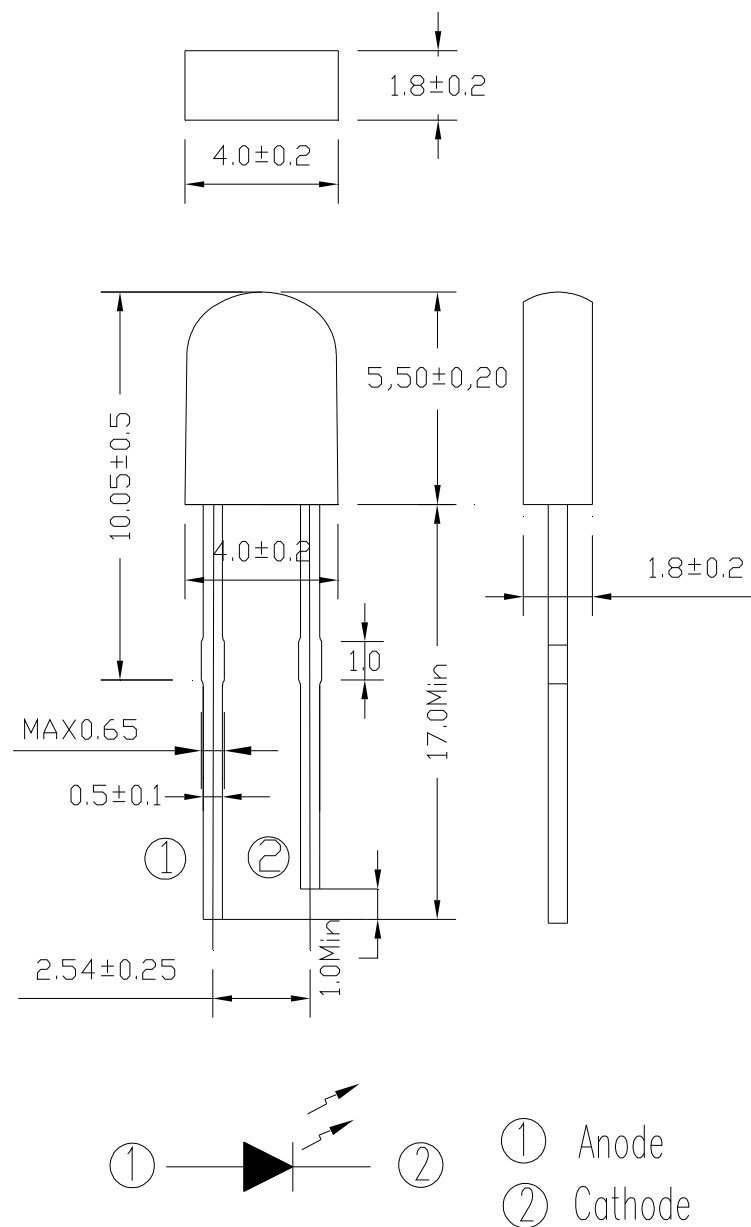Package Dimensions

Notes: 1.All dimensions are in millimeters
2.Tolerances unless dimensions $\pm 0.25 \text{ mm}$

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I_F	100	mA
Peak Forward Current*1	I_{FP}	1.0	A
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Soldering Temperature*2	T_{sol}	260	°C
Power Dissipation at(or below) 25°C Free Air Temperature	P_d	180	mW

Notes: *1: I_{FP} Conditions--Pulse Width $\leq 100 \mu s$ and Duty $\leq 1\%$.

*2:Soldering time ≤ 5 seconds.

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Radiant Intensity	I_e	$I_F=20mA$	2.5	3.5	5.5	mW/sr
		$I_F=250mA, f=60Hz,$ Pulse Width =50%	--	40	--	
Peak Wavelength	λ_p	$I_F=20mA$	--	940	--	nm
Spectral Bandwidth	$\Delta \lambda$	$I_F=20mA$	--	50	--	nm
Forward Voltage	V_F	$I_F=20mA$	1.10	1.20	1.50	V
		$I_F=100mA$	1.20	1.30	1.70	
Reverse Current	I_R	$V_R=5V$	--	--	10	μA
View Angle	$2\theta_{1/2}$	$I_F=20mA(X)$	--	95	--	deg
		$I_F=20mA(Y)$	--	45	--	

Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs.
Ambient Temperature

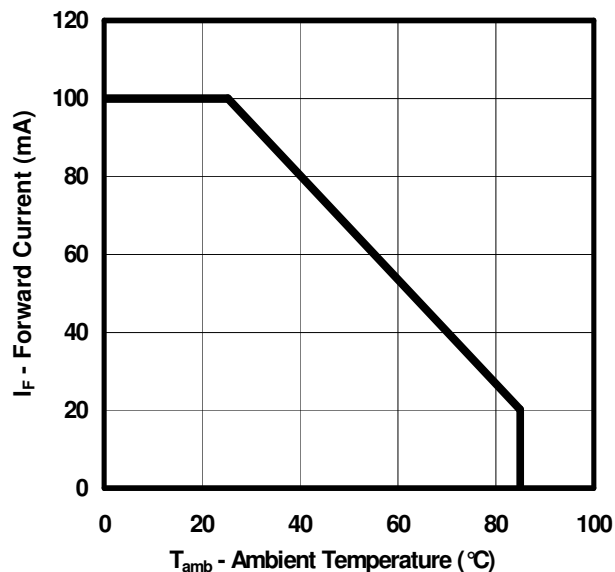


Fig.2 Spectral Distribution

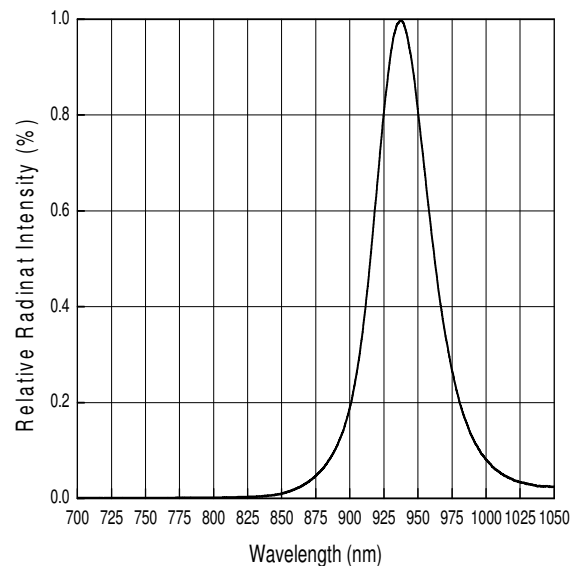


Fig.3 Radiant Intensity vs. Forward Current


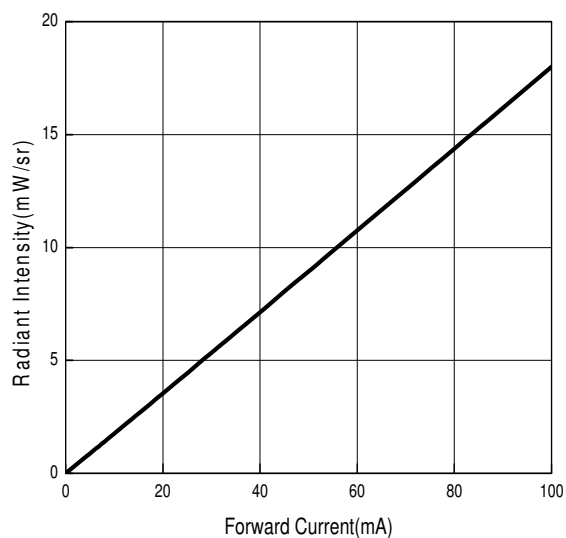


Fig.4 Forward Current vs. Forward Voltage

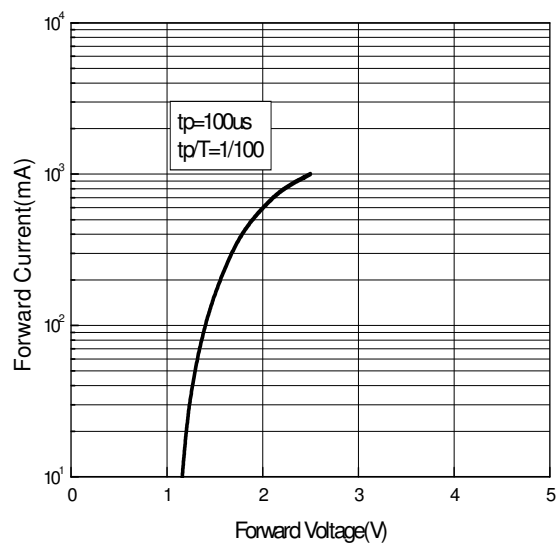


Typical Electro-Optical Characteristics Curves


Fig.5 Relative Radiant Intensity vs.

Angular Displacement

(X position)

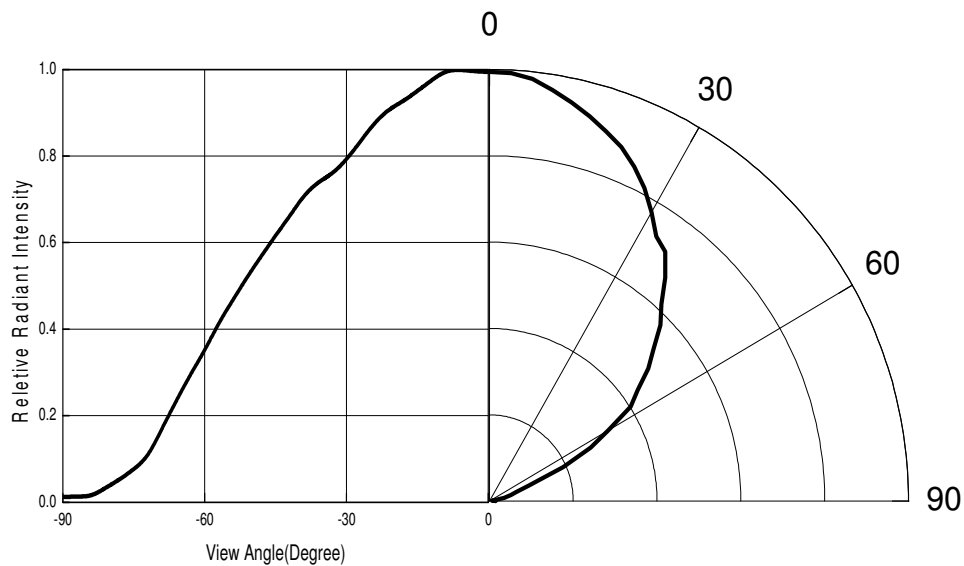

(Y position)

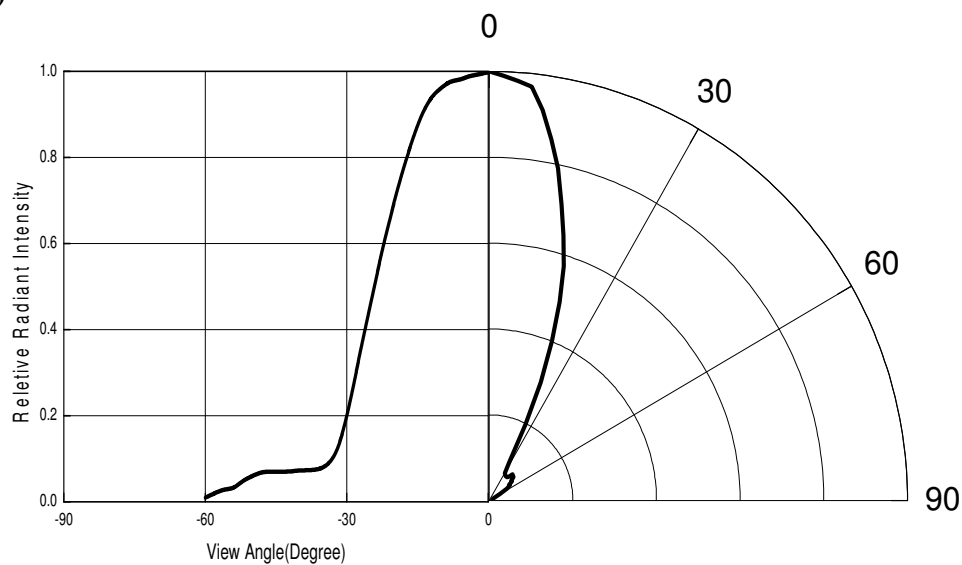

Packing Quantity Specification

1.500PCS/1Bag , 5Bags/1Box

2.10Boxes/1Carton

Label Form Specification

The diagram shows a rectangular label with the following elements:

- Top Left:** A circle containing the text "Pb".
- Top Center:** A rectangular box containing the text "EVERLIGHT".
- Top Right:** An empty circle.
- Left Side (Top):** Text "CPN : XXXXXXXXXXXXX", "P/N : XXXXXXXXXXXXX", followed by a barcode, and "XXXXXXXXXX".
- Left Side (Bottom):** Text "QTY : XXX", followed by a barcode, and "LOT NO : XXXXXXXXXXXX" followed by a barcode.
- Right Side:** A rectangular box containing the text "RoHS".
- Bottom Left:** Text "Reference : XXXXXXXX" followed by a barcode.
- Bottom Right:** Text "CAT : XXX", "HUE : XXX", and "REF : XXX".

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.*Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C**Tel: 886-2-2267-2000, 2267-9936**Fax: 886-2267-6244, 2267-6189, 2267-6306**<http://www.everlight.com>*