

**LED Display**  
**Product Data Sheet**  
LTS-4812CKS-PM

Spec No. :DS30-2012-0108  
Effective Date: 01/04/2020  
Revision: A

<b>LITE-ON DCC</b>
<b>RELEASE</b>



# LED DISPLAY LTS-4812CKS-PM

## 1. Description

The LTS-4812CKS-PM is a 0.39 inch (10.0 mm) digit height single digit SMD display. This device uses AS-AllnGap Yellow LED chips (AllnGap epi on GaAs substrate). The display has gray face and white segments.

### 1.1 Features

- 0.39 inch (10.0 mm) DIGIT HEIGHT
- CONTINUOUS UNIFORM SEGMENTS
- LOW POWER REQUIREMENT
- EXCELLENT CHARACTERS APPEARANCE
- HIGH BRIGHTNESS & HIGH CONTRAST
- WIDE VIEWING ANGLE
- SOLID STATE RELIABILITY
- CATEGORIZED FOR LUMINOUS INTENSITY.
- LEAD-FREE PACKAGE (ACCORDING TO ROHS)



### 1.2 Device

Part No	Description
AllnGaP Yellow	Common Anode
LTS-4812CKS-PM	Rt. Hand Decimal



# LED DISPLAY LTS-4812CKS-PM

## 3. Internal Circuit Diagram

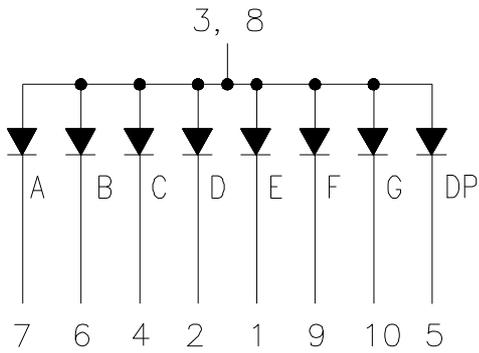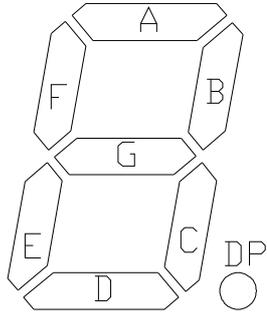

## 4. Pin Connection

No	Connection
1	CATHODE E
2	CATHODE D
3	COMMON ANODE
4	CATHODE C
5	CATHODE DP
6	CATHODE B
7	CATHODE A
8	COMMON ANODE
9	CATHODE F
10	CATHODE G

## LED DISPLAY LTS-4812CKS-PM

### 5. Rating and Characteristics

#### 5.1. Absolute Maximum Rating at Ta=25°C

Parameter	Maximum Rating	Unit
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment ( 1/10 Duty Cycle, 0.1ms Pulse Width )	90	mA
Continuous Forward Current Per Segment	25	mA
Derating Linear From 25°C Per Segment	0.28	mA/°C
Operating Temperature Range	-35°C to +105°C	
Storage Temperature Range	-35°C to +105°C	
Iron Soldering Conditions: 1/16 inch Below Seating Plane for 3 Seconds at 260°C		

#### 5.2. Electrical / Optical Characteristics at Ta=25°C

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Test Condition
Average Luminous Intensity Per Segment	IV	1301	2750	5400	μcd	IF=1mA
			30250		μcd	IF=10mA
Peak Emission Wavelength	λp		588		nm	IF=20mA
Spectral Line Half-Width	Δλ		15		nm	IF=20mA
Dominant Wavelength	λd	582.1		590	nm	IF=20mA
Forward Voltage Per Chip	VF	1.6	2.05	2.6	V	IF=20mA
Reverse Current Per Segment <sup>(2)</sup>	IR			100	μA	VR=5V
Luminous Intensity Matching Ratio (Similar Light Area)	IV-m			2:1		IF=1mA

#### Notes :

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission International De L'Eclairage) eye-response curve
- Reverse voltage is only for IR test. It cannot continue to operate at this situation
- Cross talk specification  $\leq 2.5\%$

**LED DISPLAY  
LTS-4812CKS-PM**

**5.3. Bin Range Distribution**

Bin	J	K	L
Min.	1301	2101	3401
Max.	2100	3400	5400

Unit is  $\mu\text{cd}$ , Tolerance is +/-15%






**5.4. Hue Range Distribution**

Hue	0	1	2	3
Min.	582.1	584.1	586.1	588.1
Max.	584.0	586.0	588.0	590.0

Unit is nm, Tolerance is +/-1 nm

**LED DISPLAY  
LTS-4812CKS-PM**

5.5. Typical Electrical / Optical Characteristics Curves

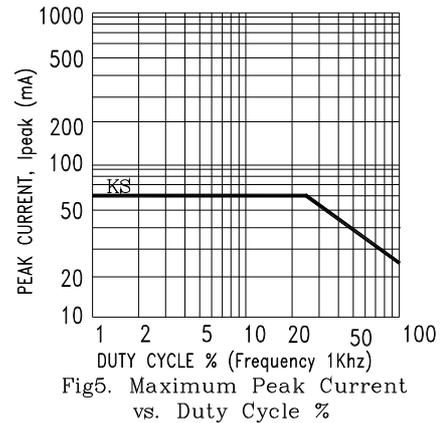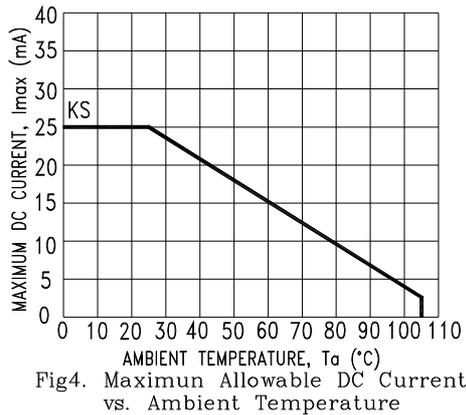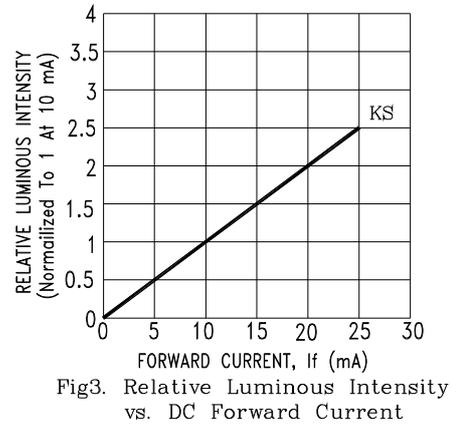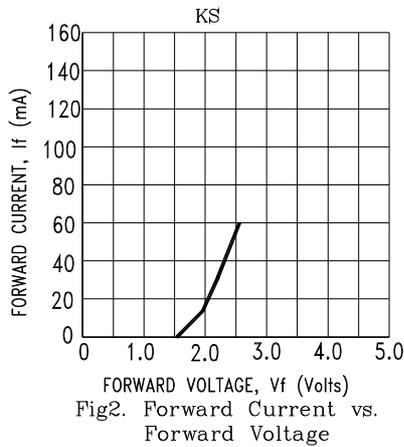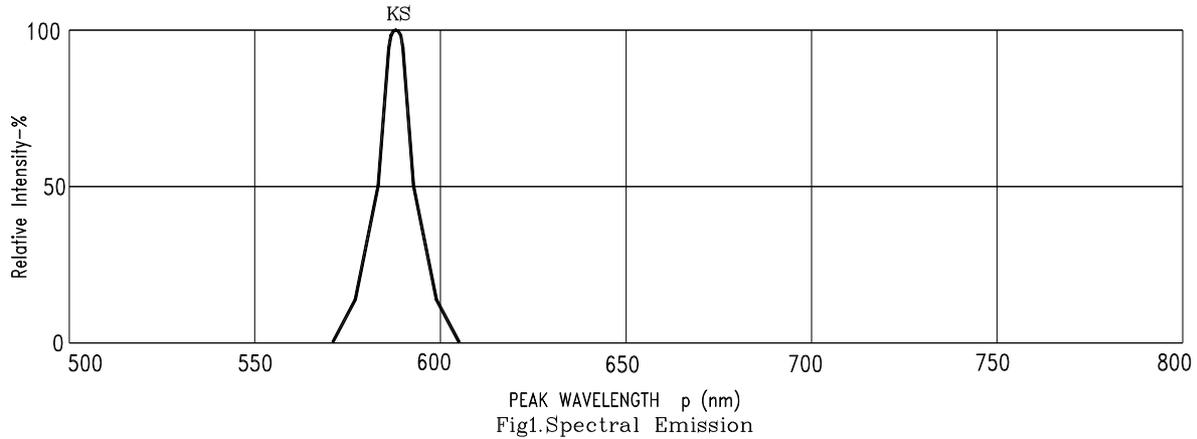


NOTE : KS=AlInGaP YELLOW

## LED DISPLAY LTS-4812CK5-PM

### 6. SMT SOLDERING INSTRUCTION

(Number of reflow process shall be less than 2 times, and cooling process to normal temperature is required between the first and the second soldering process)

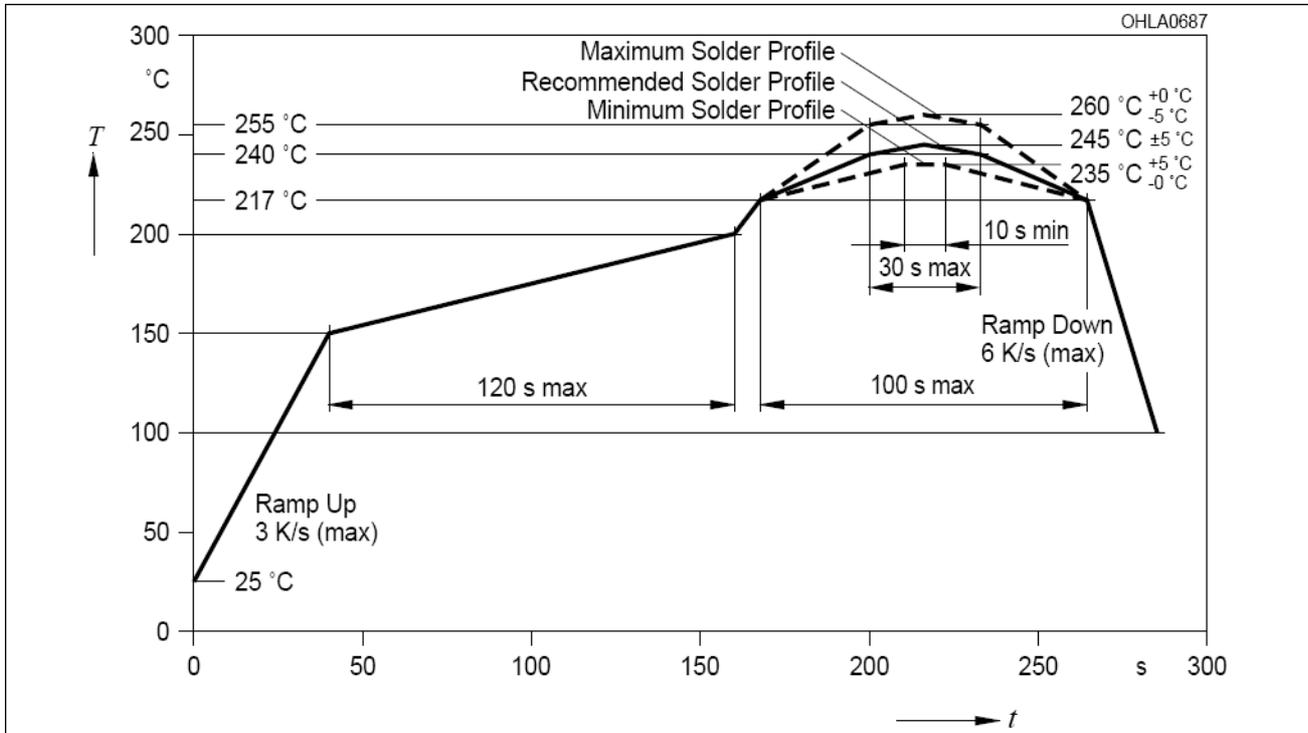

#### Notes :


1. Recommended soldering condition

Reflow Soldering (Two times only)		Soldering Iron (One time only)	
Pre-heat:	120~150°C.	Temperature	300°C Max.
Pre-heat time:	120sec. Max.	Soldering time	3sec. Max.
Peak temperature:	260°C Max.		
Soldering time:	5sec. Max.		

2. Number of reflow process shall be less than 2 times, and cooling process to normal temperature is required between the first and the second soldering process.


**LED DISPLAY  
LTS-4812CKS-PM**

**7. Recommended Soldering Pattern**

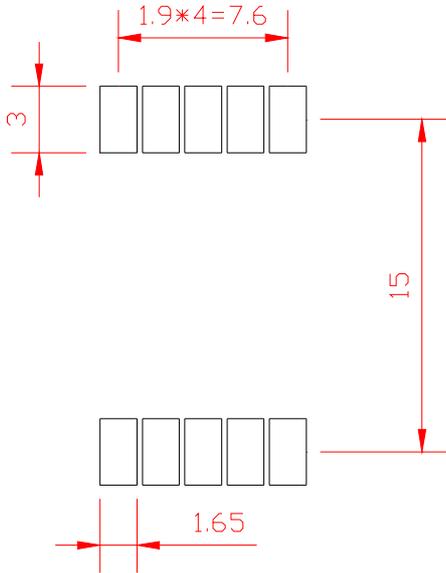

**8. Packing Specification**

**8.1. Packing Reel Dimensions**

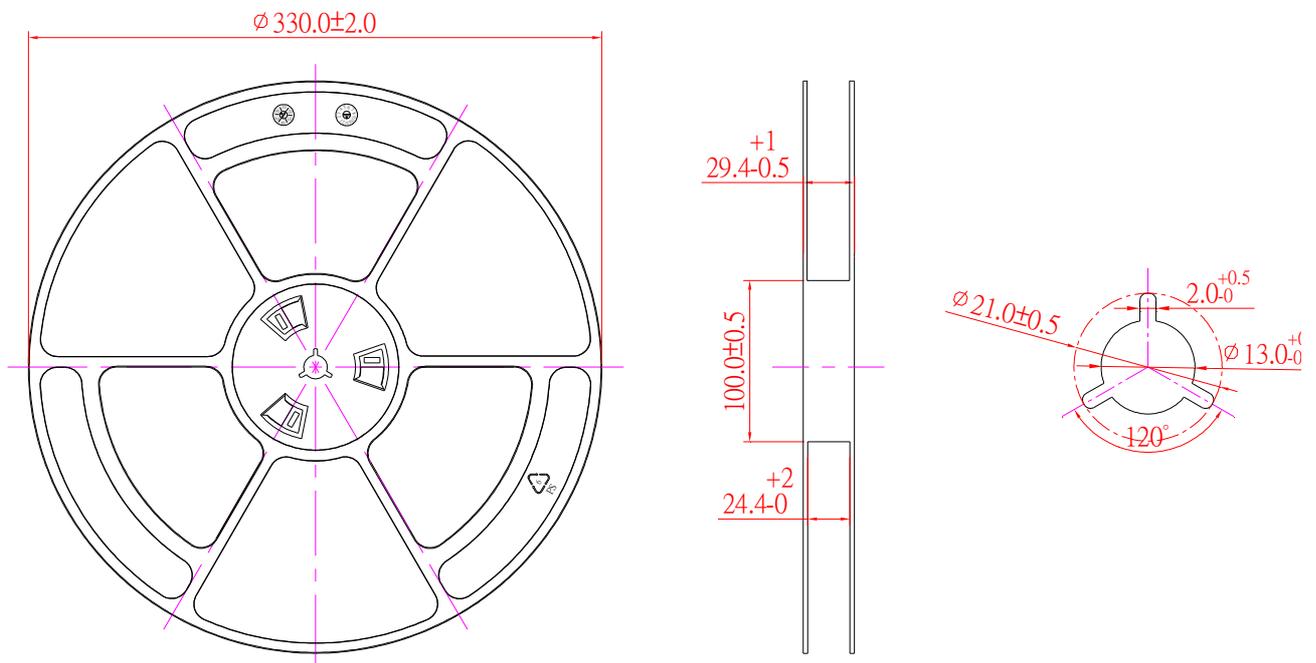




# LED DISPLAY LTS-4812CKS-PM

## 9. Moisture Proof Packing

All N/D SMD displays are shipped in moisture proof package. The displays should be stored at 30°C or less and 60% RH or less. Once the package opened, moisture absorption begins.

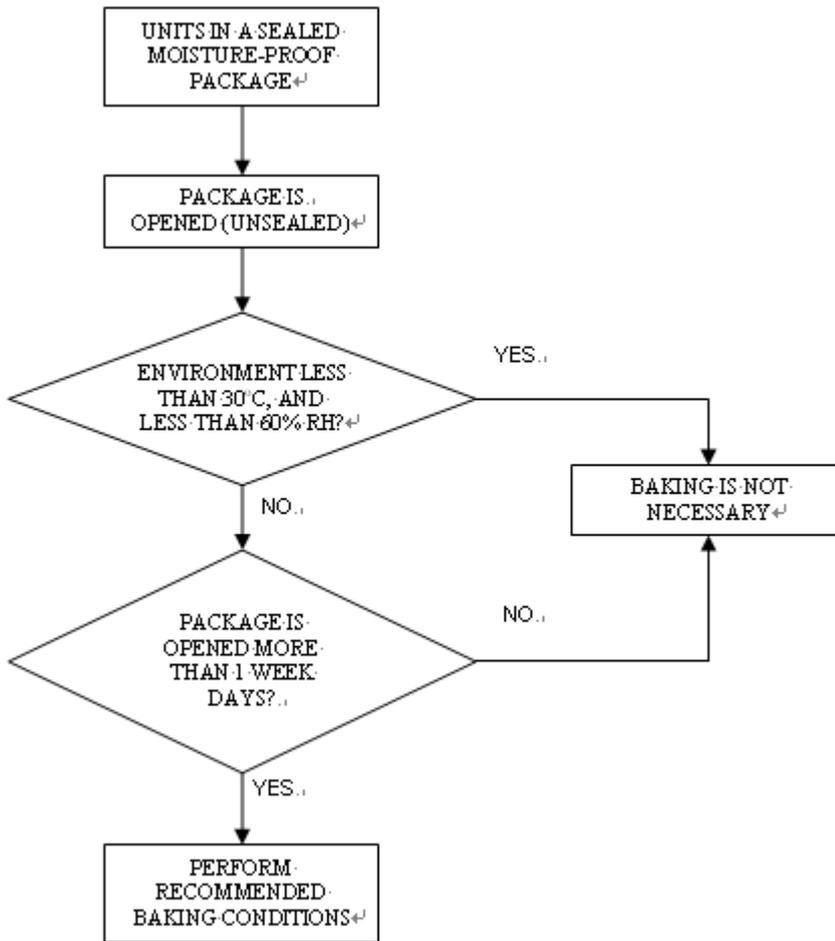

If the parts are not stored in dry conditions, they must be baked before reflow to prevent damage to the parts. Baking should only be done once

Package	Temperature	Time
In Reel	60°C	≥ 48hours
In Bulk	100°C	≥ 4hours
	125°C	≥ 2hours