

EL 2820

2820-C03501H-AM SERIES



Features

- Package : SMD package
- Color : White
- Typ. Luminous Flux : 110 lm @ 350mA
- Viewing angle : 120°
- ESD : 8KV
- MSL : 2
- Qualifications : According to AEC-Q102 Rev A
- Sulfur Test Class : A1
- Compliance with RoHS and REACH
- Compliance Halogen Free (Br <900 ppm, Cl <900 ppm, Br + Cl < 1500 ppm)

Applications

- Automotive lighting

Contents

1.	Characteristics	2
2.	Absolute Maximum Ratings.....	3
3.	Mechanical Dimension	4
4.	Recommended Soldering Pad.....	5
5.	Binning Information.....	6
6.	Characteristics Graph	8
7.	Part Number	13
8.	Ordering Information	14
9.	Reflow Soldering Profile	15
10.	Packaging Information.....	16
11.	Precaution for Use	18
12.	Sulfur Test Criteria	19

1. Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Current		I_F	50	350	500	mA	---
Luminous Flux		I_v	100	110	130	lm	$I_F=350\text{mA}$
Forward Voltage		V_F	3.00	3.25	3.75	V	$I_F=350\text{mA}$
Viewing Angle		φ	---	120	---	deg	$I_F=350\text{mA}$
Chromaticity Coordinates		CIE-X	---	0.3227	---	---	$I_F=350\text{mA}$
		CIE-Y	---	0.3351	---	---	
Thermal Resistance (Junction to Solder)	Real	$R_{th\ JS\ real}$	---	20	22	K/W	$I_F=350\text{mA}$
	Electrical	$R_{th\ JS\ el}$	---	---	16		



Notes :

- 1.Luminous Flux measurement tolerance: $\pm 8\%$
- 2.The data of Luminous Flux measured at thermal pad= 25°C
- 3.Forward Voltage measurement tolerance: $\pm 0.05\text{V}$
- 4.Tolerance of Chromaticity Coordinates X, Y: ± 0.005 .

2. Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Power Dissipation	P_d	1750	mW
Forward Current	I_F	500	mA
Surge Current ($t \leq 10 \mu\text{s}$; $D=0.005$; $T_s=25 \text{ }^\circ\text{C}$)	I_{FM}	1000	mA
Reverse Voltage	V_R	Not designed for reverse operation	V
Junction Temperature	T_J	150	$^\circ\text{C}$
Operating Temperature	T_{opr}	-40 ~ +125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +125	$^\circ\text{C}$
ESD Sensitivity ($R=1.5\text{k}\Omega$, $C=100\text{pF}$)	ESD_{HBM}	8	kV
Soldering Temperature	Reflow	260 $^\circ\text{C}$ for 30sec	$^\circ\text{C}$

3. Mechanical Dimension

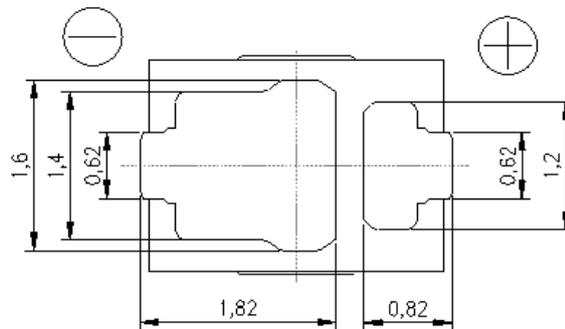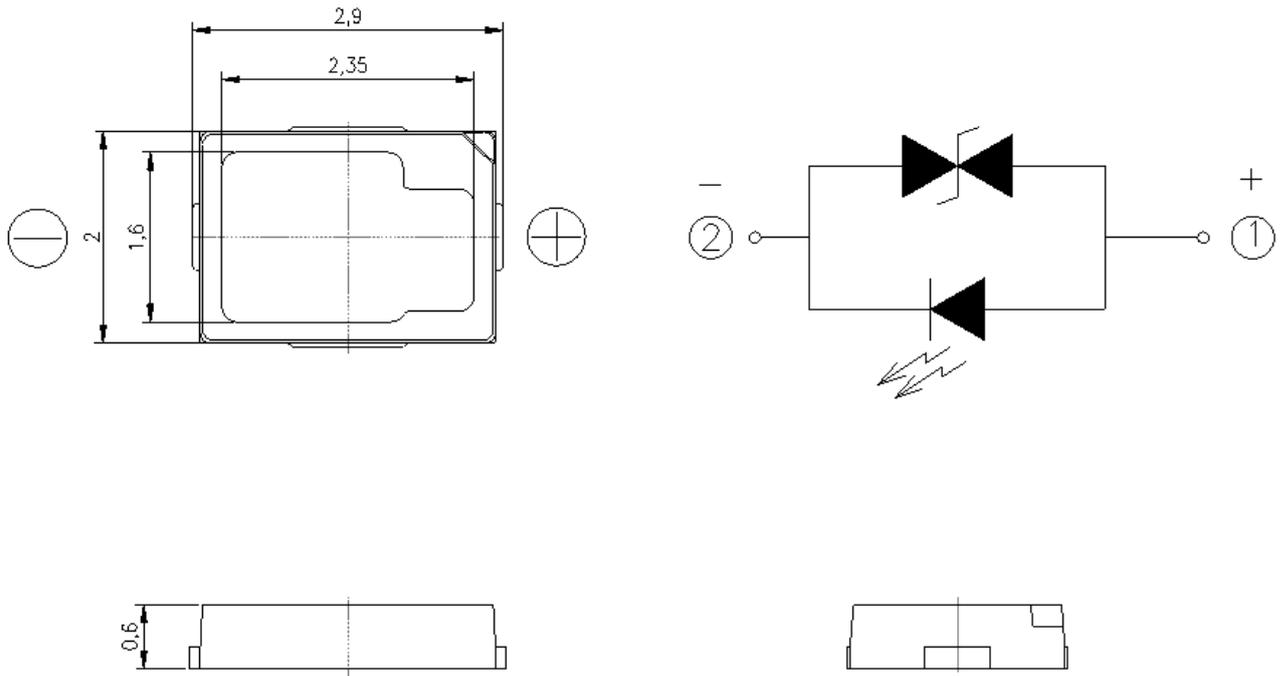


Bot. view

Notes :

- 1. Dimensions are in millimeters.
- 2. Tolerances unless mentioned are ± 0.1 mm.

4. Recommended Soldering Pad

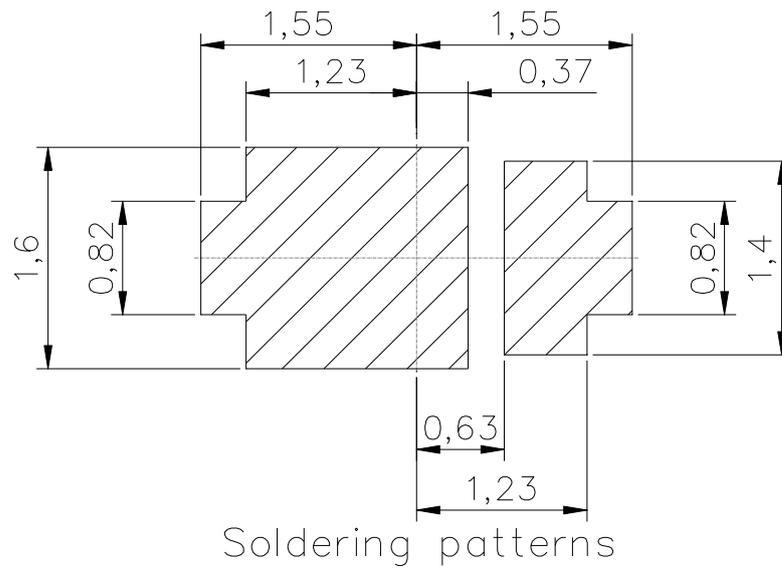

Suggested pad dimension is just reference only.
Please modify the pad dimension based on individual need.

Notes :

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.1 mm.

5. Binning Information

Luminous Flux Bins

Bin code	Min. Luminous Flux (lm)	Max. Luminous Flux (lm)
J1	100	110
J2	110	120
J3	120	130


Forward Voltage Bins

Bin code	Min Forward Voltage [V]	Max Forward Voltage [V]
3032	3.00	3.25
3235	3.25	3.5
3537	3.50	3.75

Notes :

- 1.Luminous Flux measurement tolerance: $\pm 8\%$
2. Forward Voltage measurement tolerance: $\pm 0.05V$
- 3.Current pulse time: 25ms

Color Bins Structure

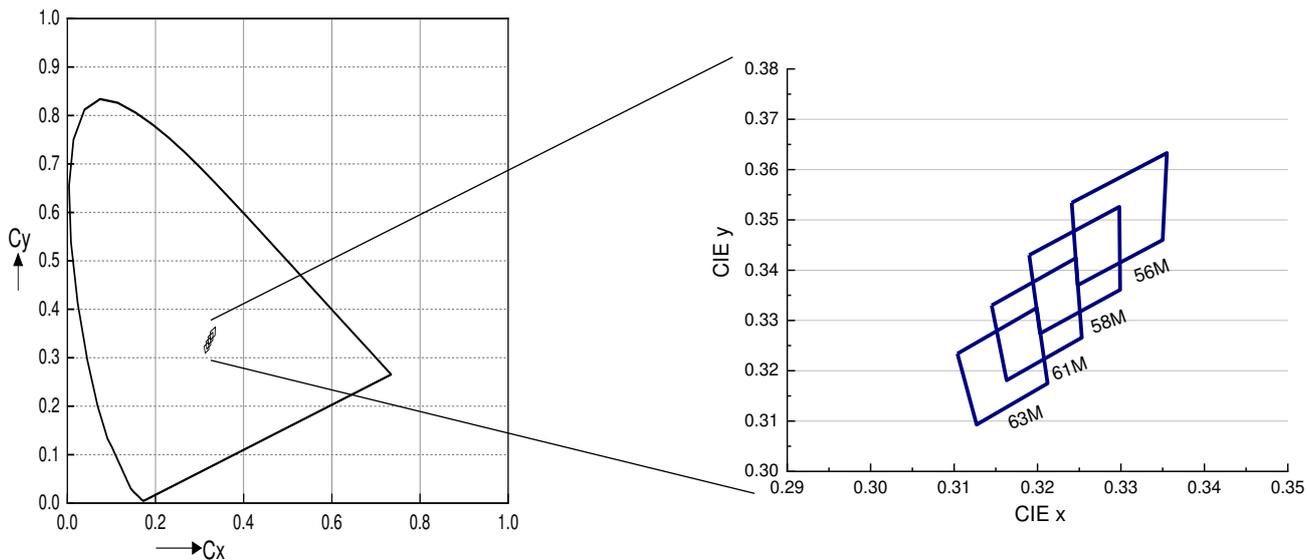

Cool White Bin Coordinates

Bin	CIE x	CIE y
56M	0.3241	0.3534
	0.3355	0.3633
	0.3350	0.3460
	0.3248	0.3370

Bin	CIE x	CIE y
58M	0.3190	0.3430
	0.3298	0.3526
	0.3299	0.3361
	0.3203	0.3274


Bin	CIE x	CIE y
61M	0.3145	0.3330
	0.3246	0.3424
	0.3253	0.3266
	0.3163	0.3181

Bin	CIE x	CIE y
63M	0.3104	0.3234
	0.3199	0.3325
	0.3212	0.3175
	0.3127	0.3093

6. Characteristics Graph


Wavelength Characteristics Relative Spectral Distribution
 @ Ts = 25°C, If=350mA

$$\Phi_v / \Phi_v (Max.) = f(\lambda)$$

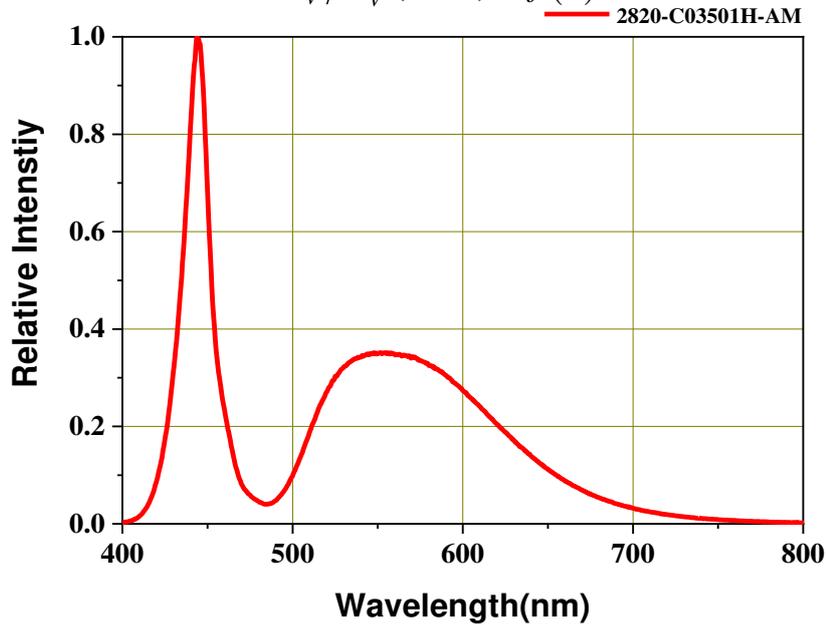

Typical Diagram Characteristics of Radiation

$$\Phi_v / \Phi_v (0^\circ) = f(\varphi)$$

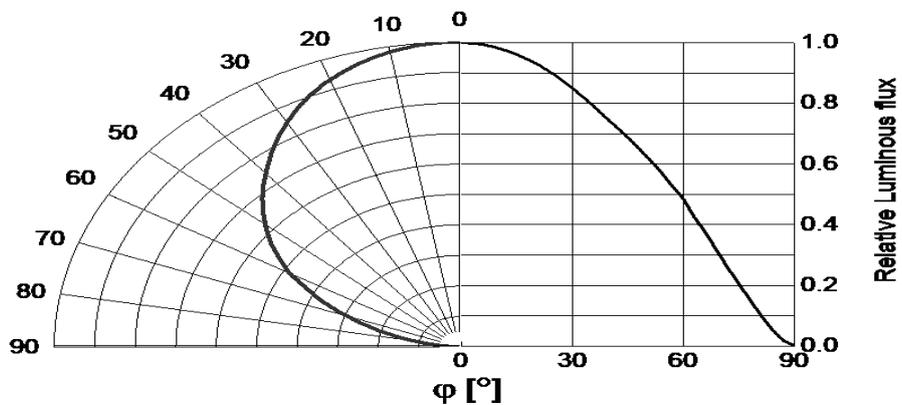


Notes :

1. φ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value
2. View angle tolerance is $\pm 5^\circ$


Forward Current vs. Forward Voltage @ Ts = 25°C

$$I_F = f(V_F)$$

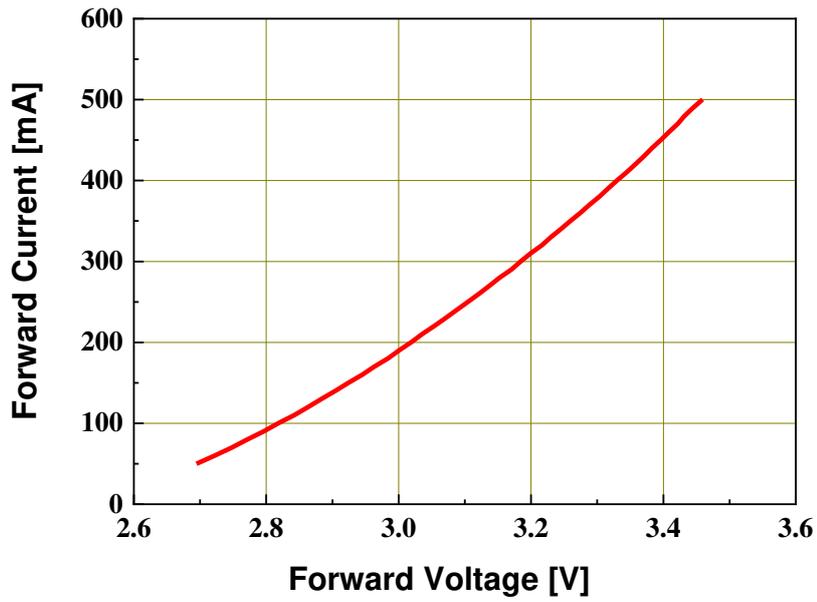

Relative Luminous Flux vs. Forward Current @ Ts = 25°C


$$\Phi_v / \Phi_v(350mA) = f(I_F)$$

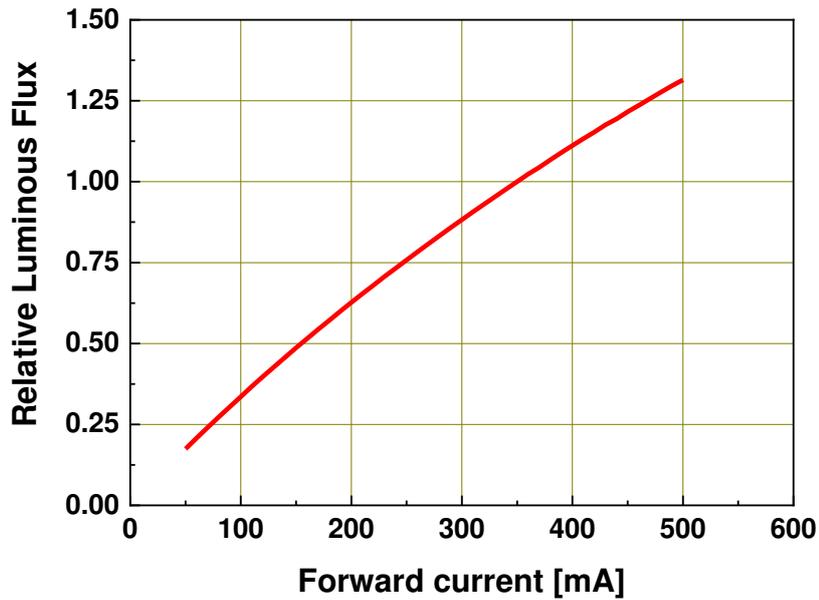

Chromaticity Coordinates Shift vs. Forward Current

@ Ts = 25°C


$$\Delta CIE_x, \Delta CIE_y = f(I_F)$$

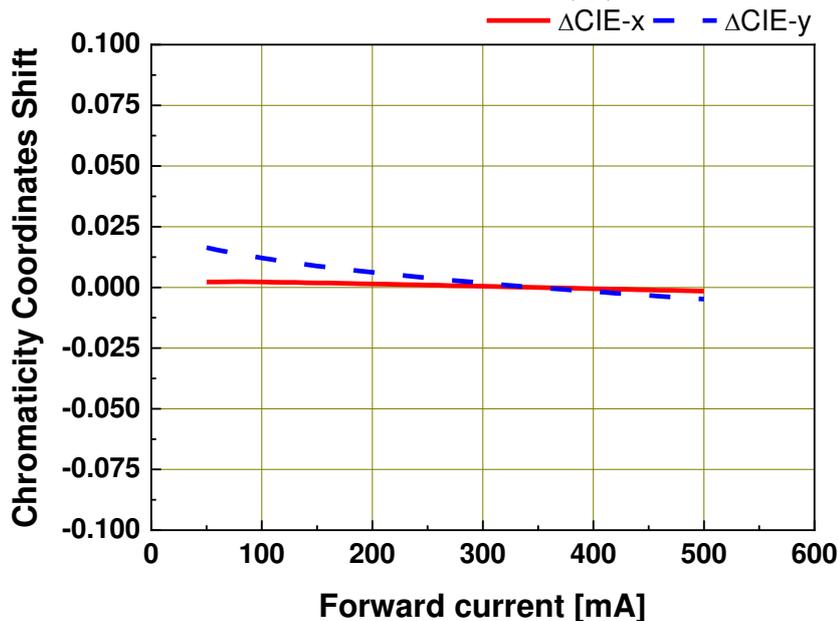

Relative Forward Voltage vs. Junction Temperature


@ If=350mA

$$\Delta V_F = V_F - V_F(25^\circ C) = f(T_j)$$

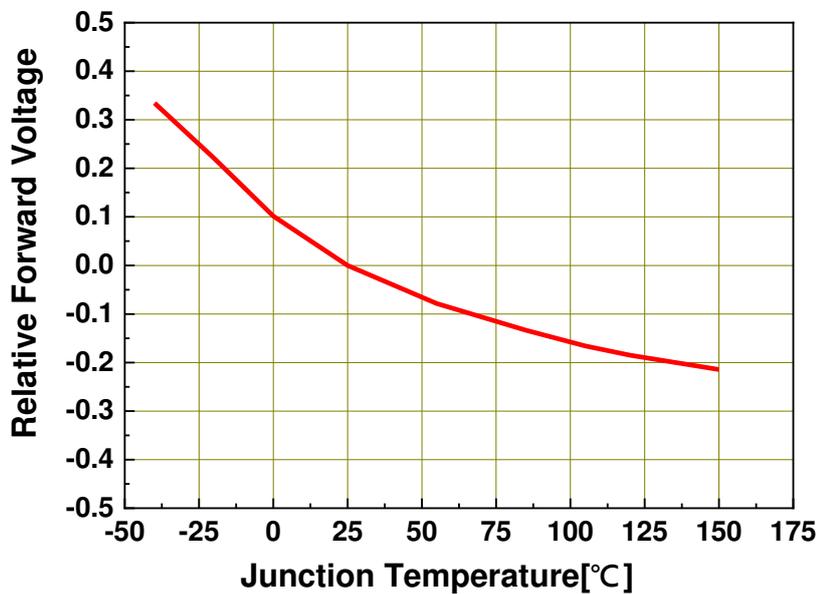

Relative Luminous Flux vs. Junction Temperature @ I_F=350mA


$$\Phi_v / \Phi_v(25^\circ C) = f(T_j)$$

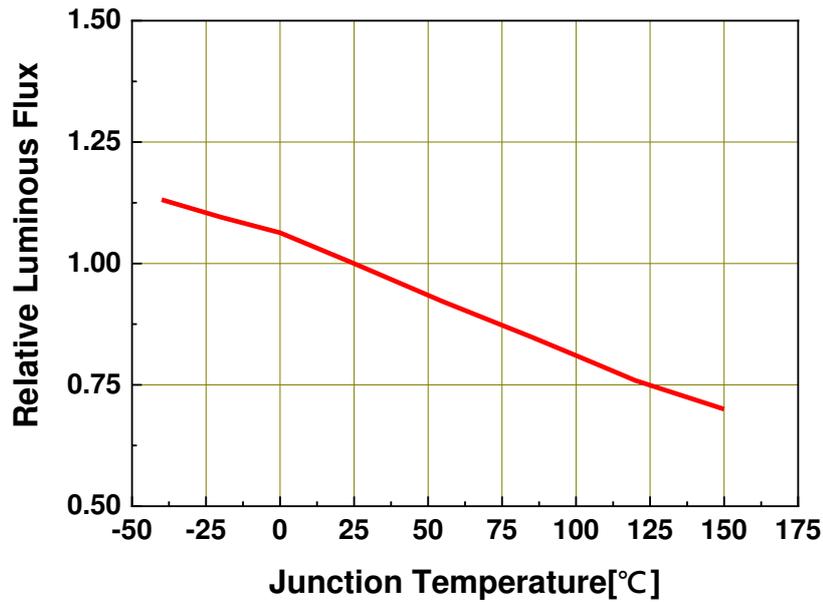

Chromaticity Coordinates Shift vs. Junction Temperature

@ I_F=350mA

$$\Delta CIE x, \Delta CIE y = f(T_j)$$

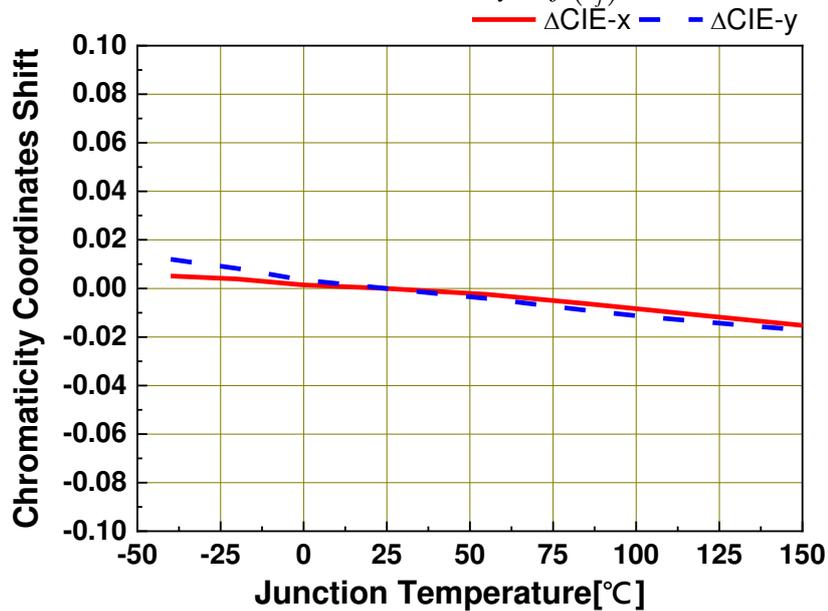

7. Part Number

2820-C03501H-AM

Part number is designated with below details

- 2820 = Product family name
- C= Color
- 0 = CRI (0=N/A; >70%=7; >80%=8; >90%=9)
- 350 = Test current [mA].
- 1 = Lead Frame Type (0=Ag ; 1=Au).
- H = Brightness Level (H=High; M=Medium; L=Low).
- AM = Automotive application.

Notes :

Color

Symbol	Description
C	Cool White
N	Neutral White
WW	Warm White
PA	Phosphor Converted Amber
PR	Phosphor Converted Red
UB	Blue
IB	Ice Blue
SB	Sky Blue
UP	Purple
UG	Green
UY	Yellow
UYG	Brilliant Yellow Green
UPG	Pale Green
UA	Amber
UR	Red
SR	Super Red
RGB	RGB-Color
PYG	Phosphor Converted Yellow Green

8. Ordering Information


Part Number	Order Code
2820-C03501H-AM	2820-C03501H- ABCDEFGHIJKL -MN-AM

Order code contains information with below details :

- 1.ABCD = min/max wavelength or CCT.
- 2.EFGH = min./max. luminous flux in [lm] or luminous intensity in [mcd].
- 3.IJKL= min./max. forward voltage.
- 4.MN = Packing code.
- 5.AM = Automotive Application.

9. Reflow Soldering Profile

Soldering Condition (Reference: IPC/JEDEC J-STD-020D)

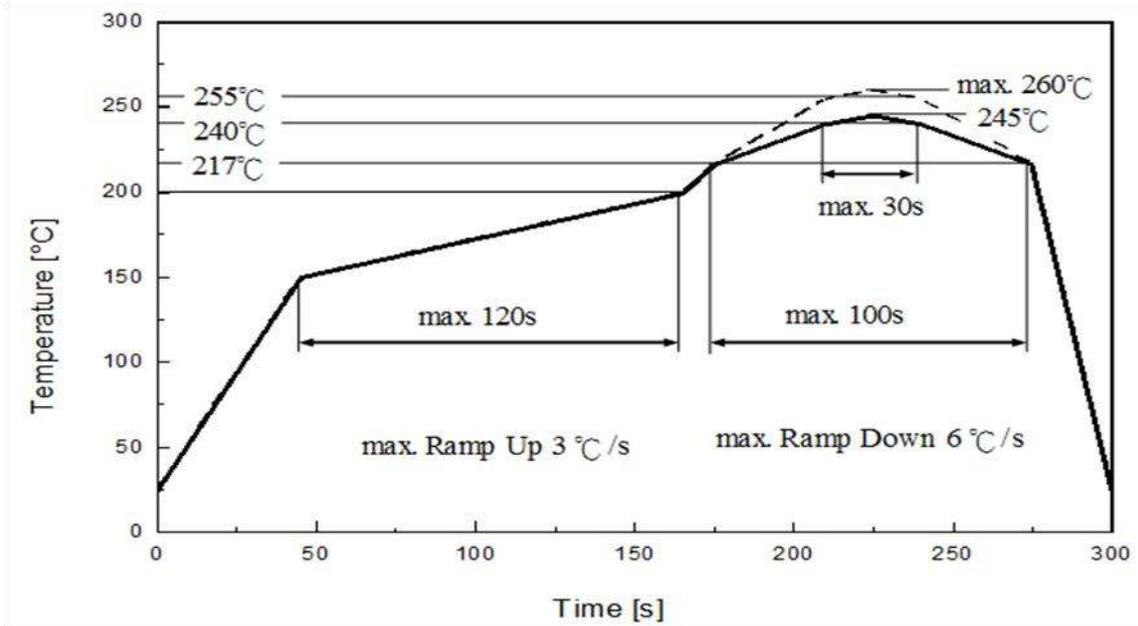

Profile Feature	Pb-Free Assembly	Unit
	Recommendation	
Ramp-up rate to preheat 25 °C to 150 °C	3	°C /sec
Time of soaking zone 150 °C to 200 °C	120	sec
Ramp-up rate to peak	3	°C /sec
Liquid's temperature	217	°C
Time above liquid's temperature	100	sec
Peak temperature (max.)	260	°C
Time within 5°C of the specified peak temperature	30	sec
Ramp-down Rate (max.)	6	°C /sec

10. Packaging Information

● Product Labeling


RoHS Pb **EVERLIGHT** 5

CPN: XXXXXXXXXXXXXXXXXXXX
 XXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXX-XXXXXX
 P/N: XXXXXXXXXXXX
 XXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXX-XXXXXX
 LOT NO: Y150716XXX-XXXXXXXXXX-XXXXXXXXXX
 QTY: 0123456789 HUE: XXXXXXXXXXXX
 CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX
 REFERENCE: BTPYYMDDXXXXX
 MSL-X MADE IN XXXXXXX



- CPN : Customer's Product Number
- P/N : Everlight Part Number
- QTY : Packing Quantity
- CAT : Luminous Flux (Brightness) Bin
- HUE : Color Bin
- REF : Forward Voltage Bin
- LOT No : Lot Number


● Packing: Loaded Quantity 2000 pcs Per Reel

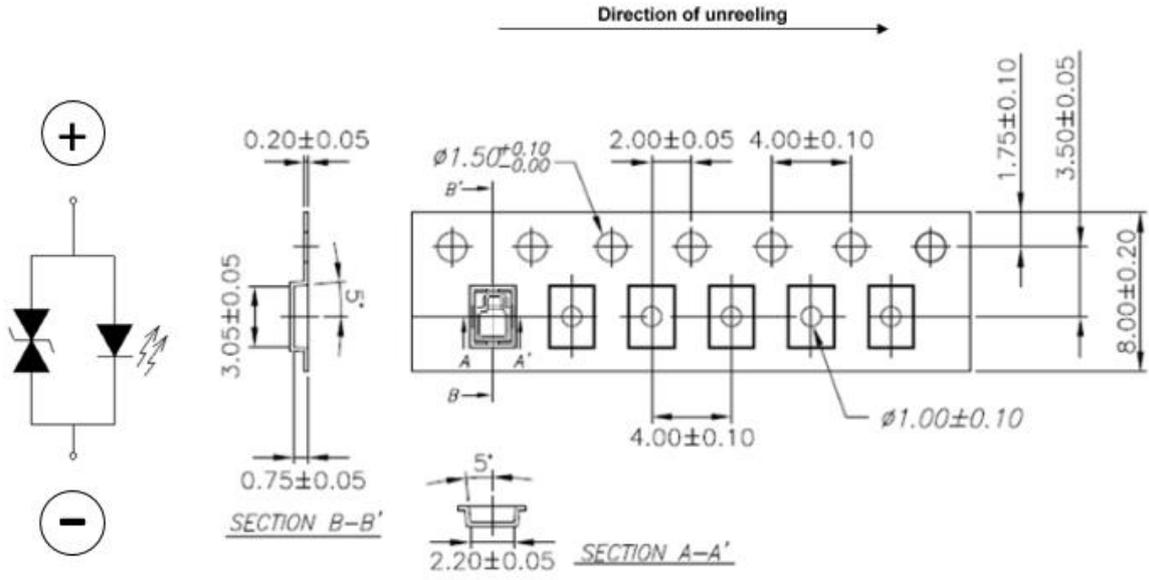

Notes :

1. Dimensions are in millimeters.


● Reel Dimensions

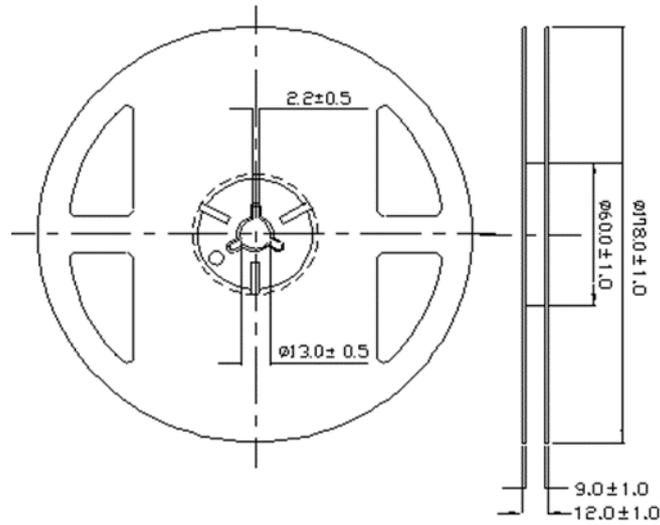

Notes :

1. Dimensions are in millimeters.

● Moisture Resistant Packing Process

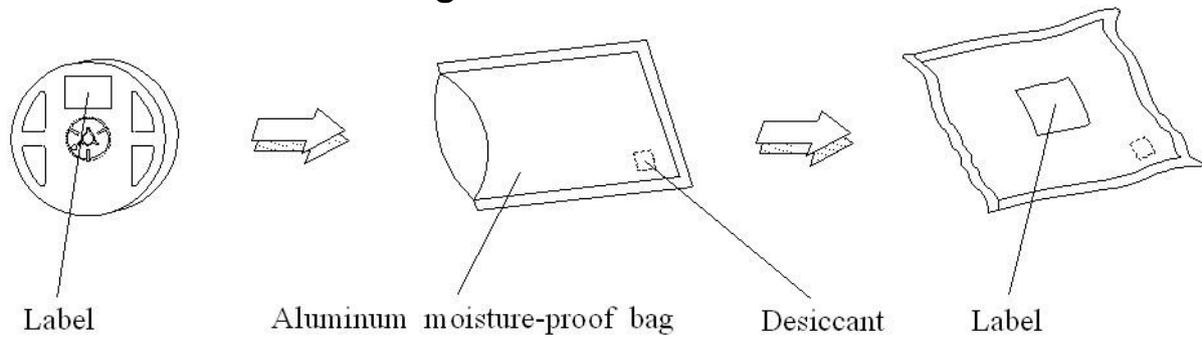

11. Precaution for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (burn out will happen) ◦

2. Assemblies

Do not stack assemblies containing LEDs to prevent damage to the optical surface of LEDs. Forces applied to the optical surface may result in the surface being damaged ◦

3. Soldering Condition

3.1 When soldering, do not put stress on the LEDs during heating ◦

3.2 After soldering, do not warp the circuit board ◦

4. Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder ◦

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

6. Reverse Operation

This product is intended to be operated applying a forward current within the specified range. Applying any continuous reverse bias or forward bias below the voltage range of light emission shall be avoided because it may cause migration which can change the electro-optical characteristics or damage the LED.

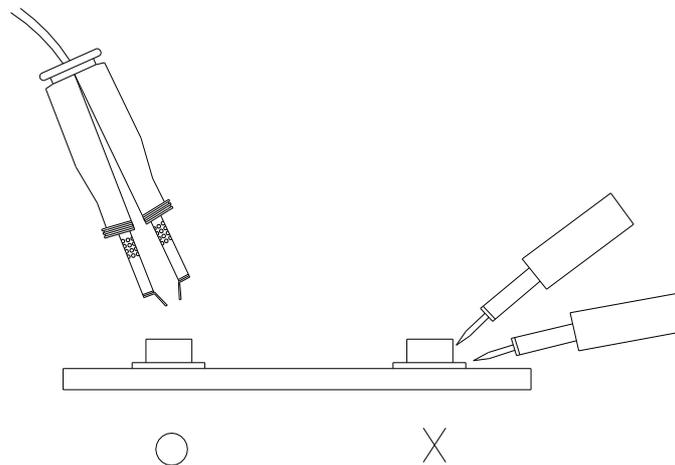

12. Sulfur Test Criteria

Products	Failure Criteria
Exterior Lighting products	Luminous Flux +/-20%, forward voltage +/-10%, color coordinates x, y +/-0.01, color wavelength +/- 2 nm Visual defect issue following Everlight's inspection criteria
Interior lighting products	Luminous Flux +/-30% or +/-50% for some application, forward voltage +/-10%, color coordinates x, y +/-0.02, color wavelength +/- 2 nm Visual defect issue following Everlight's inspection criteria

H2S test	Grade A0	Grade A1	Grade B0	Grade B1
Class A	Pass ΔIV, ΔColor, ΔVF criteria No Corrosion	Pass ΔIV, ΔColor, ΔVF criteria Corrosion without the impact on reliability and lifetime		
Class B			Pass ΔIV, ΔColor, ΔVF criteria No Corrosion	Pass ΔIV, ΔColor, ΔVF criteria Corrosion without the impact on reliability and lifetime

Condition for H2S and FMG	Description	
	H2S	FMG
Class A	15 ppm with duration 336 h at 40 °C and 90% RH	Duration 500 h at 25 °C and 75% RH. H2S concentration: 10ppb SO2 concentration: 200ppb NO2 concentration: 200ppb Cl2 concentration: 10ppb
Class B	10 ppm with duration 500 h at 25 °C and 75% RH	

Grade for H2S Test	Description
0	No Corrosion
1	Corrosion without the impact on reliability and lifetime