

SMD ▪ MID Power LED XI3030E/LKE-HXXXX68Z15/2T



Features

- PLCC-2 package
- Top view white LED
- High luminous intensity output
- Wide viewing angle
- RoHS compliant
- ANSI Binning
- Pb-free

Description

The Everlight XI3030E package has high efficacy, high CRI, low power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

Applications

- General lighting
- Decorative and Entertainment Lighting
- Indicators
- Illumination
- Switch lights

Product Number Explanation

Mass Production List

Series For 4000K 165lm

Product	CRI Min. (1)	CCT(K)	Φ(lm) Min. (2)
XI3030E/LKE-H2213568Z15/2T	70	2200K	135
XI3030E/LKE-H2715068Z15/2T	70	2700K	150
XI3030E/LKE-H3015568Z15/2T	70	3000K	155
XI3030E/LKE-H3516068Z15/2T	70	3500K	160
XI3030E/LKE-H4016568Z15/2T	70	4000K	165
XI3030E/LKE-H5016568Z15/2T	70	5000K	165
XI3030E/LKE-H5716568Z15/2T	70	5700K	165
XI3030E/LKE-H6016568Z15/2T	70	6000K	165
XI3030E/LKE-H6516068Z15/2T	70	6500K	160

Series For 4000K 175lm

Product	CRI Min. (1)	CCT(K)	Φ(lm) Min. (2)
XI3030E/LKE-H2715868Z15/2T	70	2700K	158
XI3030E/LKE-H3016368Z15/2T	70	3000K	163
XI3030E/LKE-H3517068Z15/2T	70	3500K	170
XI3030E/LKE-H4017568Z15/2T	70	4000K	175
XI3030E/LKE-H5017568Z15/2T	70	5000K	175
XI3030E/LKE-H5717568Z15/2T	70	5700K	175
XI3030E/LKE-H6517068Z15/2T	70	6500K	170

Notes:

1. Tolerance of Color Rendering Index: ± 2
2. Tolerance of Luminous flux: $\pm 11\%$.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	Cool White Neutral White Warm White	Water Clear

Absolute Maximum Ratings (T_{Soldering}=25℃)

Parameter	Symbol	Rating	Unit
Forward Current	I _F	180	mA
Peak Forward Current (Duty 1/10 @10ms)	I _{FP}	300	mA
Power Dissipation	P _d	1224	mW
Operating Temperature	T _{opr}	-40 ~ +85	℃
Storage Temperature	T _{stg}	-40 ~ +100	℃
Thermal Resistance (Junction / Soldering point)	R _{th J-S}	17	℃/W
Junction Temperature	T _j	125	℃
Soldering Temperature	T _{sol}	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Note:
The products are sensitive to static electricity and must be carefully taken when handling products

Electro-Optical Characteristics (T_{Soldering}=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux ⁽¹⁾	Φ	135	-----	195	lm	I _F =150mA
Forward Voltage ⁽²⁾	V _F	5.4	-----	6.8	V	I _F =150mA
Color Rendering Index ⁽³⁾	R _a	70	-----	-----		I _F =150mA
	R ₉	-40	-----	-----		I _F =150mA
Viewing Angle	2θ _{1/2}	-----	120	-----	deg	I _F =150mA
Reverse Current	I _R	-----	-----	50	μA	V _R =10V

Notes:
1. Tolerance of Luminous flux: ±11%.
2. Tolerance of Forward Voltage: ±0.1V.
3. Tolerance of Color Rendering Index: ±2

Bin Range of Luminous Flux**Series For 4000K 165lm****2200K**

Bin Code	Min.	Max.	Unit	Condition
135L5	135	140	lm	I _F =150mA
140L5	140	145		
145L5	145	150		

2700K

Bin Code	Min.	Max.	Unit	Condition
150L5	150	155	lm	I _F =150mA
155L5	155	160		
160L5	160	165		

3000K

Bin Code	Min.	Max.	Unit	Condition
155L5	155	160	lm	I _F =150mA
160L5	160	165		
165L5	165	170		

3500K/6500K

Bin Code	Min.	Max.	Unit	Condition
160L5	160	165	lm	I _F =150mA
165L5	165	170		
170L5	170	175		

4000K/5000K/5700K/6000K

Bin Code	Min.	Max.	Unit	Condition
165L5	165	170	lm	I _F =150mA
170L5	170	175		
175L5	175	180		

Series For 4000K 175lm**2700K**

Bin Code	Min.	Max.	Unit	Condition
158L5	158	163	lm	I _F =150mA
163L5	163	168		
168L5	168	173		
173L5	173	178		

3000K

Bin Code	Min.	Max.	Unit	Condition
163L5	163	168	lm	I _F =150mA
168L5	168	173		
173L5	173	178		
178L5	178	183		

3500K/6500K

Bin Code	Min.	Max.	Unit	Condition
170L5	170	175	lm	I _F =150mA
175L5	175	180		
180L5	180	185		
185L5	185	190		

4000K/5000K/5700K

Bin Code	Min.	Max.	Unit	Condition
175L5	175	180	lm	I _F =150mA
180L5	180	185		
185L5	185	190		
190L5	190	195		

Note:

Tolerance of Luminous flux: ±11%.


Bin Range of Forward Voltage

Group	Bin Code	Min.	Max.	Unit	Condition
5668	54B	5.4	5.6	V	I _F =150mA
	56B	5.6	5.8		
	58B	5.8	6.0		
	60B	6.0	6.2		
	62B	6.2	6.4		
	64B	6.4	6.6		
	66B	6.6	6.8		

Note:
Tolerance of Forward Voltage: ±0.1V.


EVERLIGHT

The C.I.E. 1931 Chromaticity Diagram

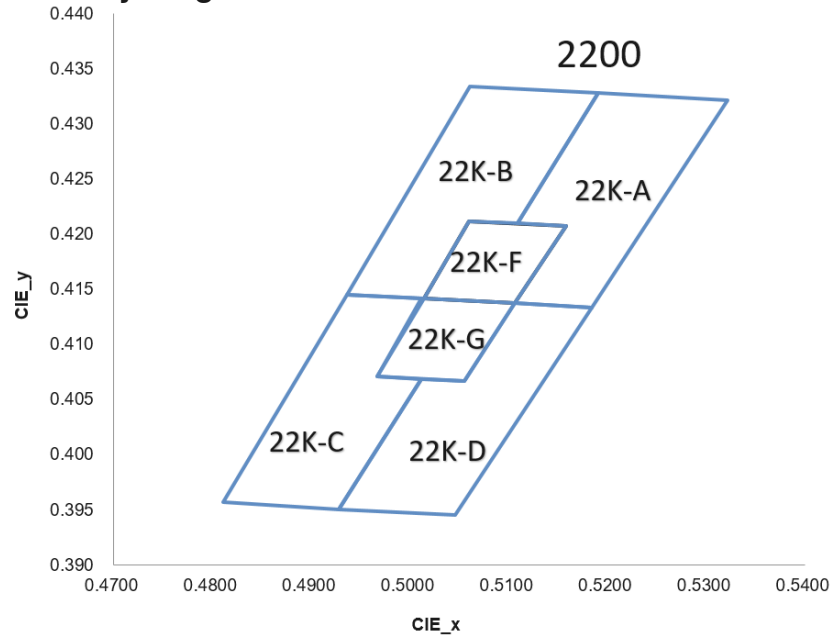

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
2200K	22K-A	0.5322	0.4322	22K-D	0.5184	0.4134
		0.5191	0.4328		0.5106	0.4138
		0.5109	0.4210		0.5055	0.4067
		0.5158	0.4208		0.5011	0.4069
		0.5106	0.4138		0.4928	0.3951
		0.5184	0.4134		0.5046	0.3946
	Reference Range:2070K~2190K					
	22K-B	0.5191	0.4328	22K-C	0.5011	0.4142
		0.5061	0.4334		0.4936	0.4145
		0.4936	0.4145		0.4811	0.3957
		0.5014	0.4142		0.4928	0.3951
		0.5060	0.4212		0.5011	0.4069
		0.5109	0.4210		0.4967	0.4071
	Reference Range:2190K~2320K					
	22K-F	0.5158	0.4208	22K-G	0.5106	0.4138
		0.5060	0.4212		0.5014	0.4142
		0.5014	0.4142		0.4967	0.4071
		0.5106	0.4138		0.5055	0.4067
	Reference Range: 2235K~2145K					

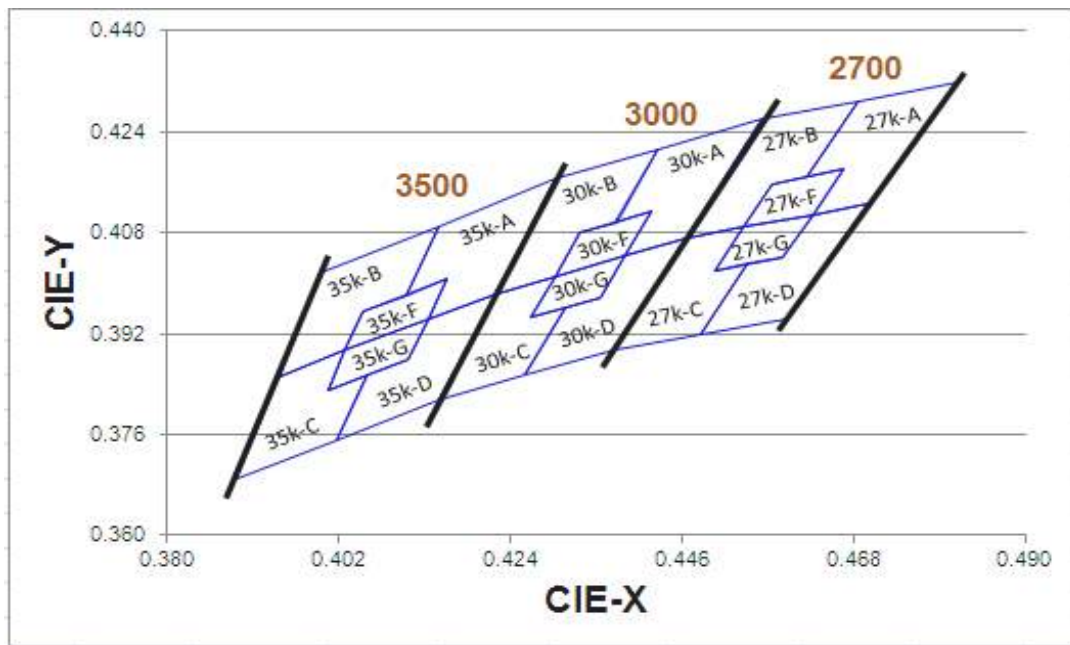


Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
2700K	27K-A	0.4813	0.4319	27K-D	0.4700	0.4126
		0.4687	0.4289		0.4627	0.4109
		0.4621	0.4169		0.4588	0.4041
		0.4667	0.4180		0.4544	0.4030
		0.4627	0.4109		0.4483	0.3919
		0.4700	0.4126		0.4593	0.3944
	Reference Range:2580K~2700K					
	27K-B	0.4687	0.4289	27K-C	0.4465	0.4071
		0.4562	0.4260		0.4373	0.3893
		0.4465	0.4071		0.4483	0.3919
		0.4539	0.4088		0.4544	0.4030
		0.4576	0.4158		0.4502	0.4020
		0.4621	0.4169		0.4539	0.4088
	Reference Range:2700K~2870K					
	27K-F	0.4667	0.4180	27K-G	0.4627	0.4109
		0.4576	0.4158		0.4539	0.4088
		0.4539	0.4088		0.4502	0.4020
		0.4627	0.4109		0.4588	0.4041
	Reference Range: 2665K~2770K					

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
3000K	30K-A	0.4562	0.4260	30K-D	0.4465	0.4071
		0.4430	0.4212		0.4388	0.4043
		0.4375	0.4096		0.4355	0.3977
		0.4422	0.4113		0.4311	0.3962
		0.4388	0.4043		0.4259	0.3853
		0.4465	0.4071		0.4373	0.3893
	Reference Range:2870K~3000K					
	30K-B	0.4430	0.4212	30K-C	0.4221	0.3984
		0.4299	0.4165		0.4147	0.3814
		0.4221	0.3984		0.4259	0.3853
		0.4297	0.4011		0.4311	0.3962
		0.4328	0.4079		0.4267	0.3946
		0.4375	0.4096		0.4297	0.4011
	Reference Range:3000K~3220K					
	30K-F	0.4422	0.4113	30K-G	0.4388	0.4043
		0.4328	0.4079		0.4297	0.4011
		0.4297	0.4011		0.4267	0.3946
		0.4388	0.4043		0.4355	0.3977
	Reference Range:2960K~3080K					

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
3500K	35K-A	0.4299	0.4165	35K-D	0.4221	0.3984
		0.4148	0.4090		0.4134	0.3943
		0.4106	0.3981		0.4108	0.3878
		0.4159	0.4007		0.4057	0.3853
		0.4134	0.3943		0.4018	0.3752
		0.4221	0.3984		0.4147	0.3814
	Reference Range:3220K~3500K					
	35K-B	0.4148	0.4090	35K-C	0.3943	0.3853
		0.3996	0.4015		0.3889	0.3690
		0.3943	0.3853		0.4018	0.3752
		0.4029	0.3893		0.4057	0.3853
		0.4051	0.3954		0.4006	0.3829
		0.4106	0.3981		0.4029	0.3893
	Reference Range:3500K~3710K					
	35K-F	0.4159	0.4007	35K-G	0.4134	0.3943
		0.4051	0.3954		0.4029	0.3893
		0.4029	0.3893		0.4006	0.3829
		0.4134	0.3943		0.4108	0.3878
	Reference Range:3360K~3540K					


The C.I.E. 1931 Chromaticity Diagram

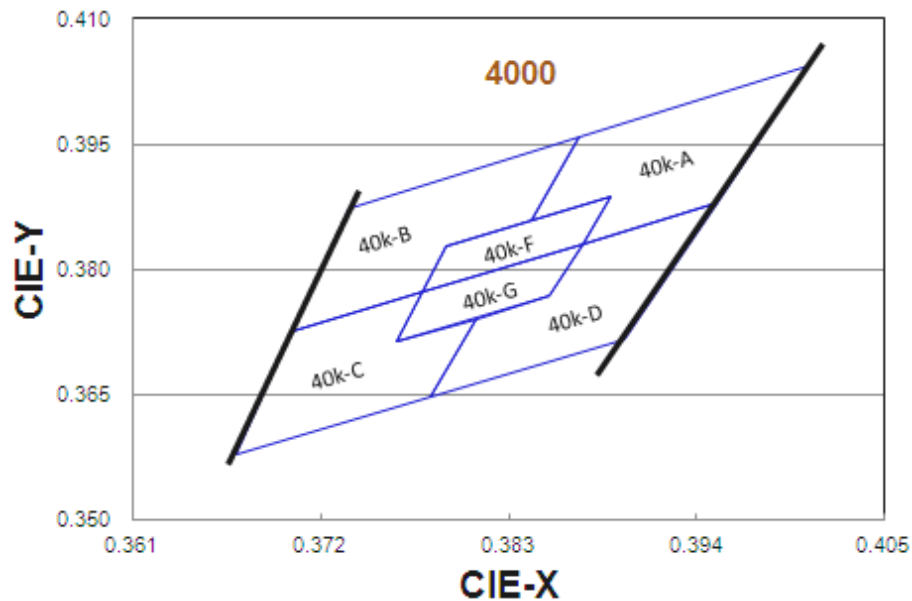

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
4000K	40K-A	0.4006	0.4044	40K-D	0.3952	0.3880
		0.3871	0.3959		0.3873	0.3831
		0.3843	0.3858		0.3854	0.3768
		0.3890	0.3887		0.3810	0.3741
		0.3873	0.3831		0.3784	0.3647
		0.3952	0.3880		0.3898	0.3716
	Reference Range:3700K~3970K					
	40K-B	0.3871	0.3959	40K-C	0.3703	0.3726
		0.3736	0.3874		0.3670	0.3578
		0.3703	0.3726		0.3784	0.3647
		0.3779	0.3773		0.3810	0.3741
		0.3793	0.3828		0.3764	0.3713
		0.3843	0.3858		0.3779	0.3773
	Reference Range:3970K~4270K					
	40K-F	0.3890	0.3887	40K-G	0.3873	0.3831
		0.3793	0.3828		0.3779	0.3773
		0.3779	0.3773		0.3764	0.3713
		0.3873	0.3831		0.3854	0.3768
	Reference Range:3870K~4080K					

The C.I.E. 1931 Chromaticity Diagram

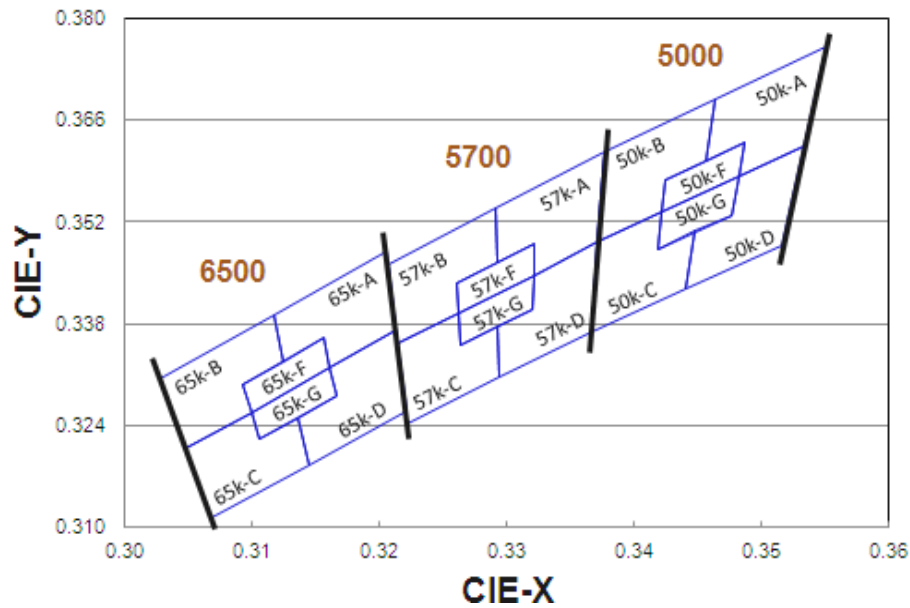

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
5000K	50K-A	0.3551	0.3760	50K-D	0.3533	0.3624
		0.3464	0.3688		0.3482	0.3583
		0.3456	0.3604		0.3477	0.3530
		0.3487	0.3629		0.3448	0.3507
		0.3482	0.3583		0.3441	0.3428
		0.3533	0.3624		0.3515	0.3487
	Reference Range:4745K~5000K					
	50K-B	0.3464	0.3688	50K-C	0.3371	0.3493
		0.3376	0.3616		0.3366	0.3369
		0.3371	0.3493		0.3441	0.3428
		0.3422	0.3533		0.3448	0.3507
		0.3425	0.3579		0.3418	0.3483
		0.3456	0.3604		0.3422	0.3533
	Reference Range:5000K~5310K					
	50K-F	0.3487	0.3629	50K-G	0.3482	0.3583
		0.3425	0.3579		0.3422	0.3533
		0.3422	0.3533		0.3418	0.3483
		0.3482	0.3583		0.3477	0.3530
	Reference Range:4910K~5120K					

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
5700K	57K-A	0.3376	0.3616	57K-D	0.3371	0.3493
		0.3292	0.3539		0.3321	0.3447
		0.3292	0.3464		0.3320	0.3401
		0.3321	0.3490		0.3293	0.3377
		0.3321	0.3447		0.3294	0.3306
		0.3371	0.3493		0.3366	0.3369
	Reference Range:5310K~5700K					
	57K-B	0.3292	0.3539	57K-C	0.3215	0.3353
		0.3207	0.3462		0.3222	0.3243
		0.3215	0.3353		0.3294	0.3306
		0.3262	0.3395		0.3293	0.3377
		0.3261	0.3436		0.3263	0.335
		0.3292	0.3464		0.3262	0.3395
	Reference Range:5700K~6020K					
	57K-F	0.3321	0.3490	57K-G	0.3321	0.3447
		0.3261	0.3436		0.3262	0.3395
		0.3262	0.3395		0.3263	0.3350
		0.3321	0.3447		0.3320	0.3401
	Reference Range:5520K~5780K					


CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
6500K	65K-A	0.3205	0.3481	65K-D	0.3213	0.3371
		0.3117	0.3393		0.3161	0.3320
		0.3125	0.3328		0.3166	0.3281
		0.3157	0.3360		0.3136	0.3251
		0.3161	0.3320		0.3145	0.3187
		0.3213	0.3371		0.3221	0.3261
	Reference Range:6020K~6500K					
	65K-B	0.3117	0.3393	65K-C	0.3048	0.3209
		0.3028	0.3304		0.3068	0.3113
		0.3048	0.3209		0.3145	0.3187
		0.3100	0.3259		0.3136	0.3251
		0.3093	0.3297		0.3106	0.3222
		0.3125	0.3328		0.31	0.3259
	Reference Range:6500K~7050K					
	65K-F	0.3157	0.3360	65K-G	0.3161	0.3320
		0.3093	0.3297		0.3100	0.3259
		0.3100	0.3259		0.3106	0.3222
		0.3161	0.3320		0.3166	0.3281
	Reference Range:6300K~6690K					

Notes:

1. The value is based on driving current by 150mA.

2. Tolerance of Chromaticity Coordinates: ± 0.01 .

The C.I.E. 1931 Chromaticity Diagram

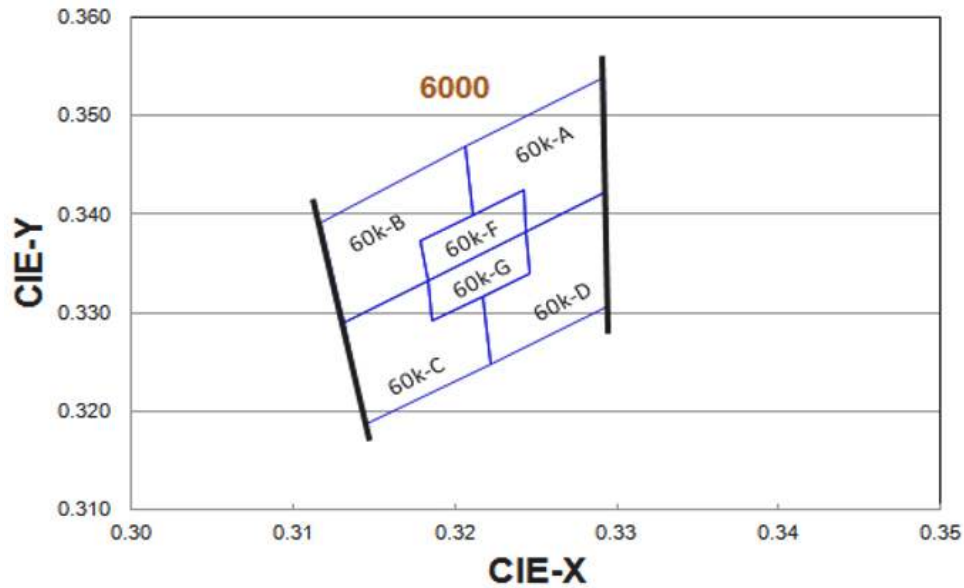


Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
6000K	60K-A	0.3292	0.3539	60K-D	0.3293	0.3423
		0.3206	0.3468		0.3244	0.3382
		0.3211	0.3399		0.3246	0.3340
		0.3242	0.3424		0.3217	0.3317
		0.3244	0.3382		0.3222	0.3248
		0.3293	0.3423		0.3294	0.3306
	Reference Range:5700K~6020K					
	60K-B	0.3206	0.3468	60K-C	0.3131	0.3290
		0.3117	0.3392		0.3145	0.3187
		0.3131	0.3290		0.3222	0.3248
		0.3183	0.3332		0.3217	0.3317
		0.3179	0.3373		0.3186	0.3292
		0.3211	0.3399		0.3183	0.3332
	Reference Range:6020K~6500K					
	60K-F	0.3242	0.3424	60K-G	0.3244	0.3382
		0.3179	0.3373		0.3183	0.3332
		0.3183	0.3332		0.3186	0.3292
		0.3244	0.3382		0.3246	0.3340
	Reference Range: 5870K~6190K					

Notes:

1. The value is based on driving current by 150mA.
2. Tolerance of Chromaticity Coordinates: ± 0.01 .

Spectrum Distribution

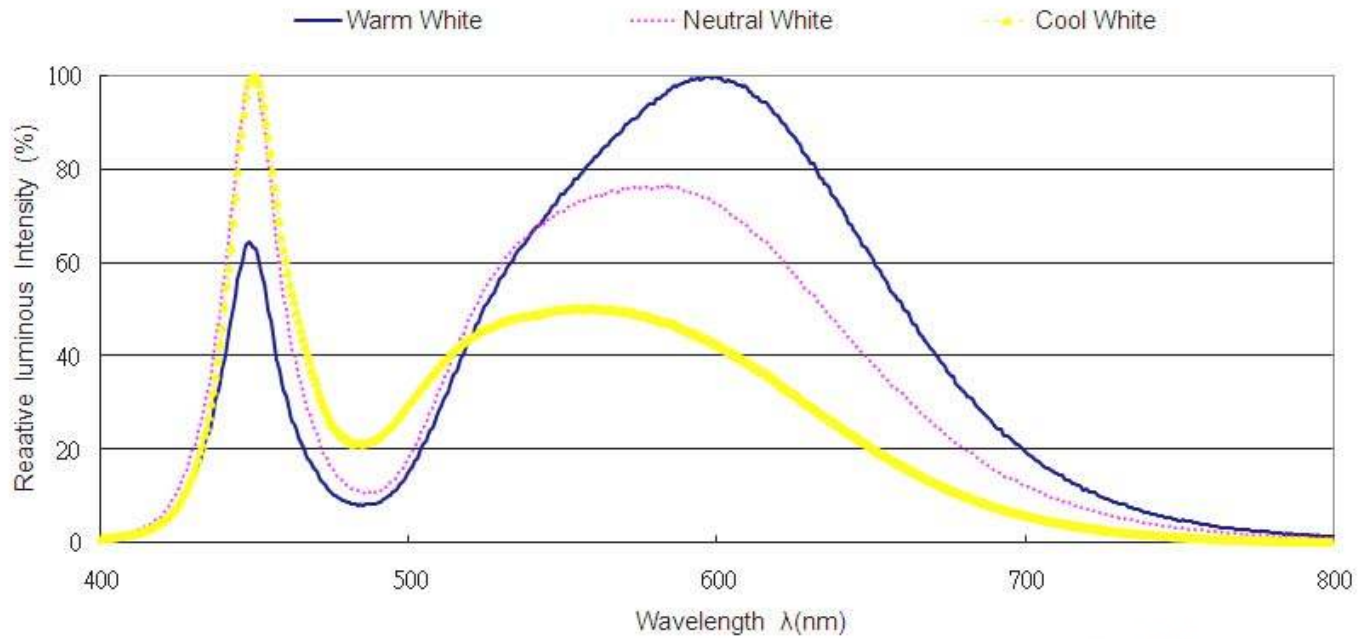

Typical Electro-Optical Characteristics Curves

Fig.1 – Forward Voltage Shift vs. Junction Temperature


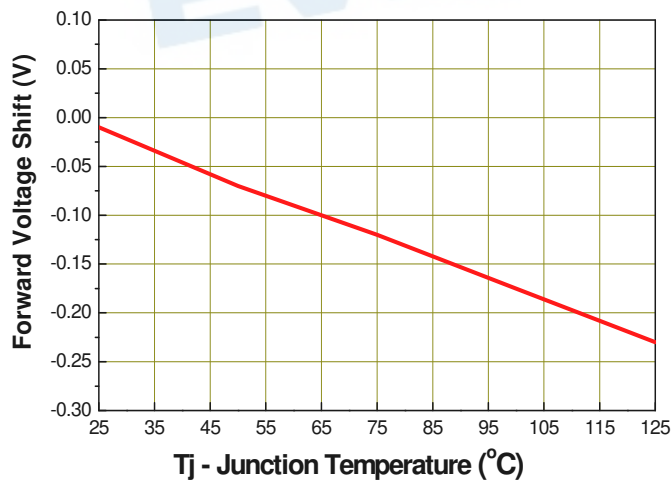


Fig.2 - Relative Luminous Intensity vs. Forward Current

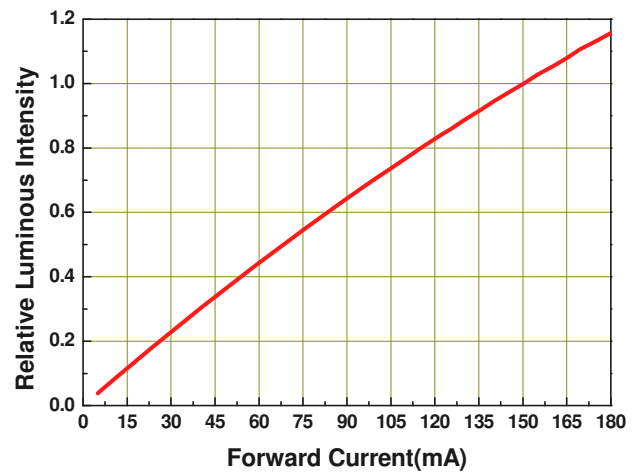

Typical Electro-Optical Characteristics Curves

Fig.3 - Relative Luminous Intensity vs. Junction Temperature

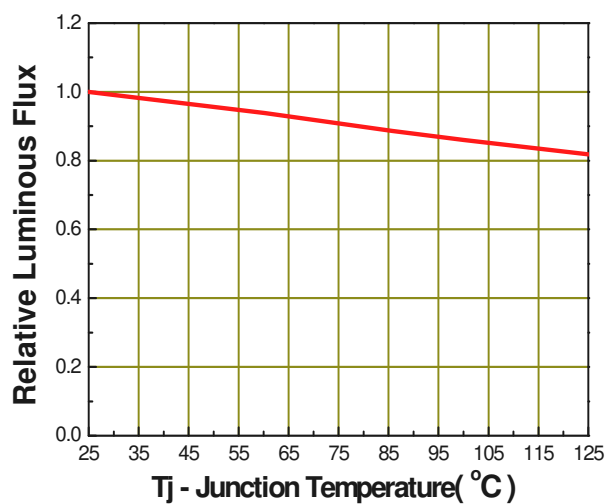


Fig.4 - Forward Current vs. Forward Voltage

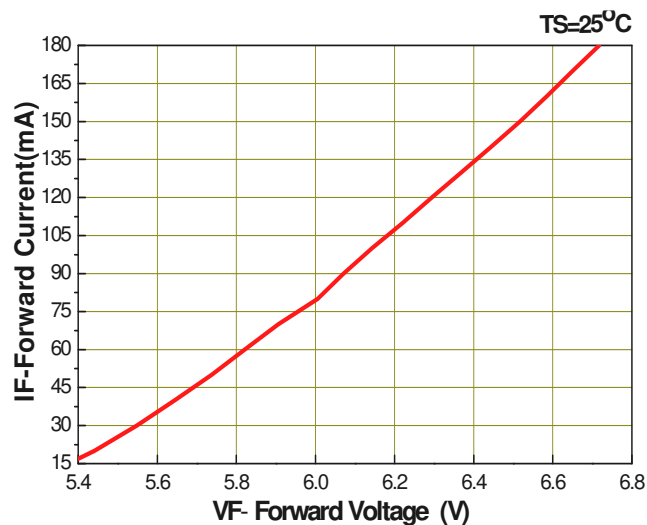


Fig.5 – Max. Driving Forward Current vs. Soldering Temperature

$R_{th\ j-s} = 21^\circ\text{C/W}$



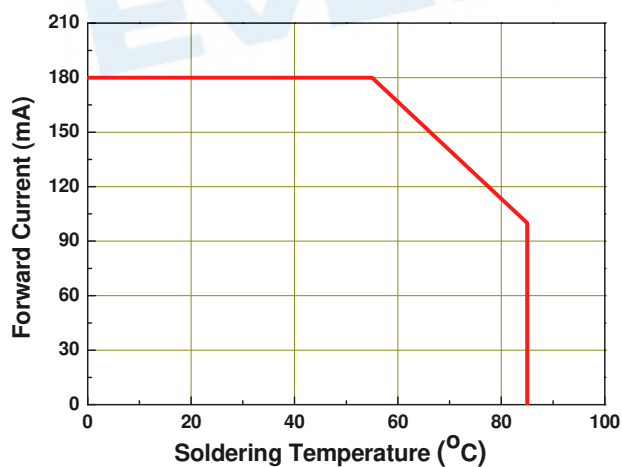





Fig.6 – Radiation Diagram

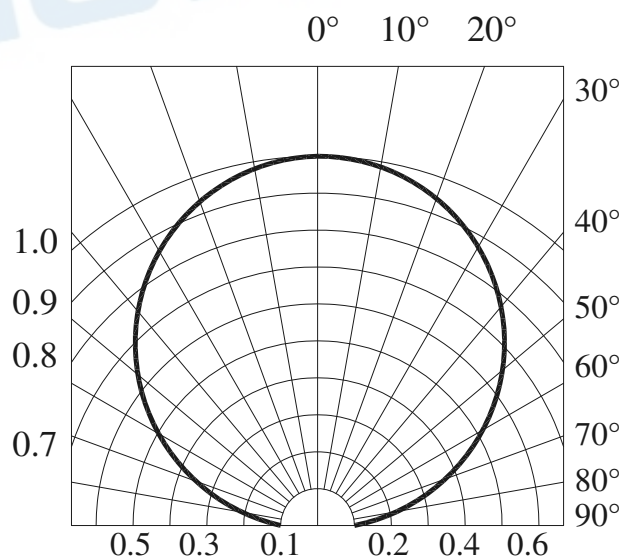


Package Dimension

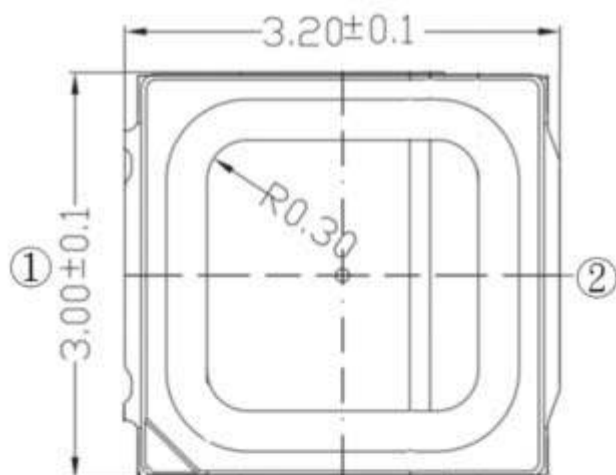

Polarity

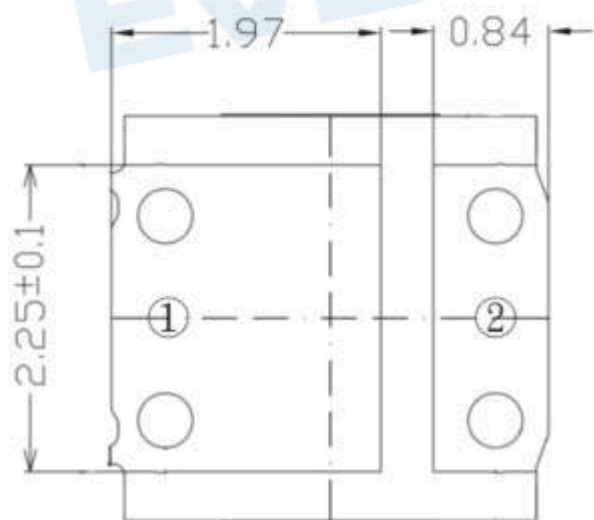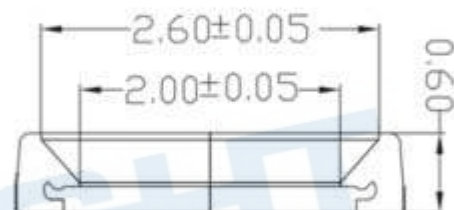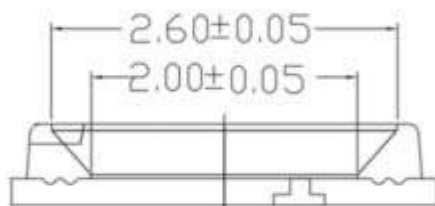

Bot. view

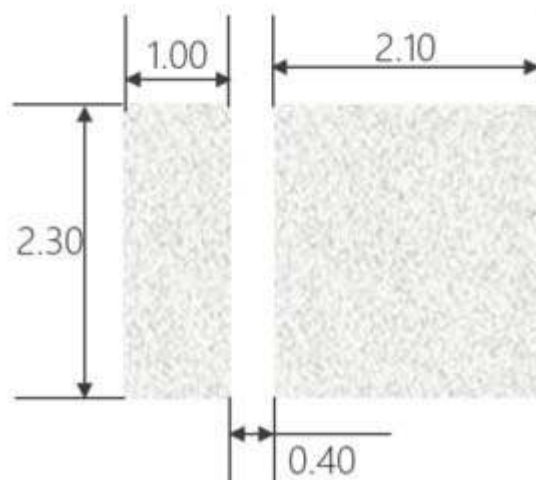


Soldering patterns

Note:

Tolerance unless mentioned is ± 0.15 mm; Unit = mm


Label Explanation

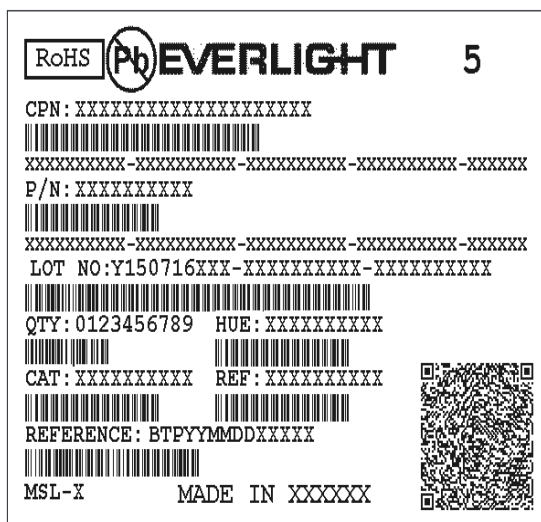

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions


Carrier Tape Dimensions:

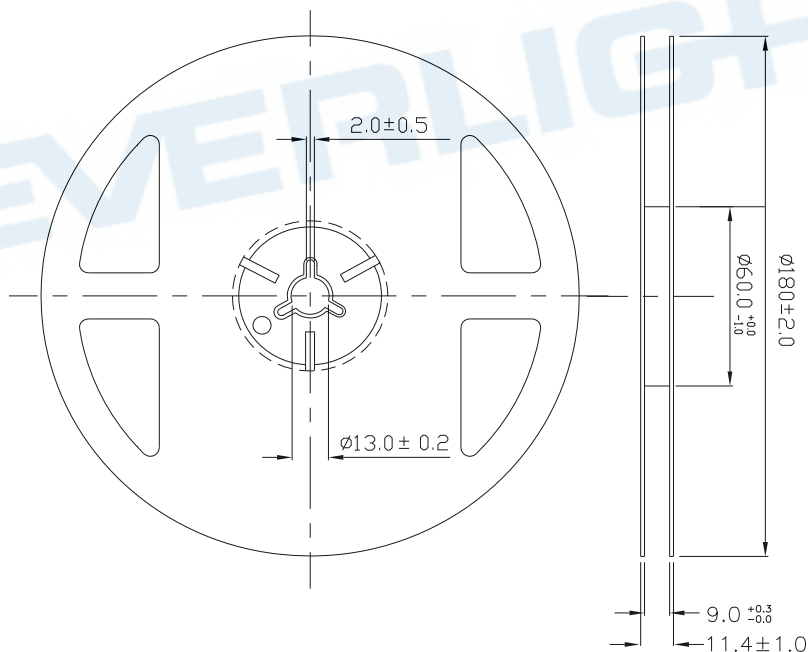

Loaded Quantity 500/1000/1500/2000/2500/3000/3500/4000 pcs Per Reel

Note:


Tolerances unless mentioned ± 0.1 mm. Unit = mm

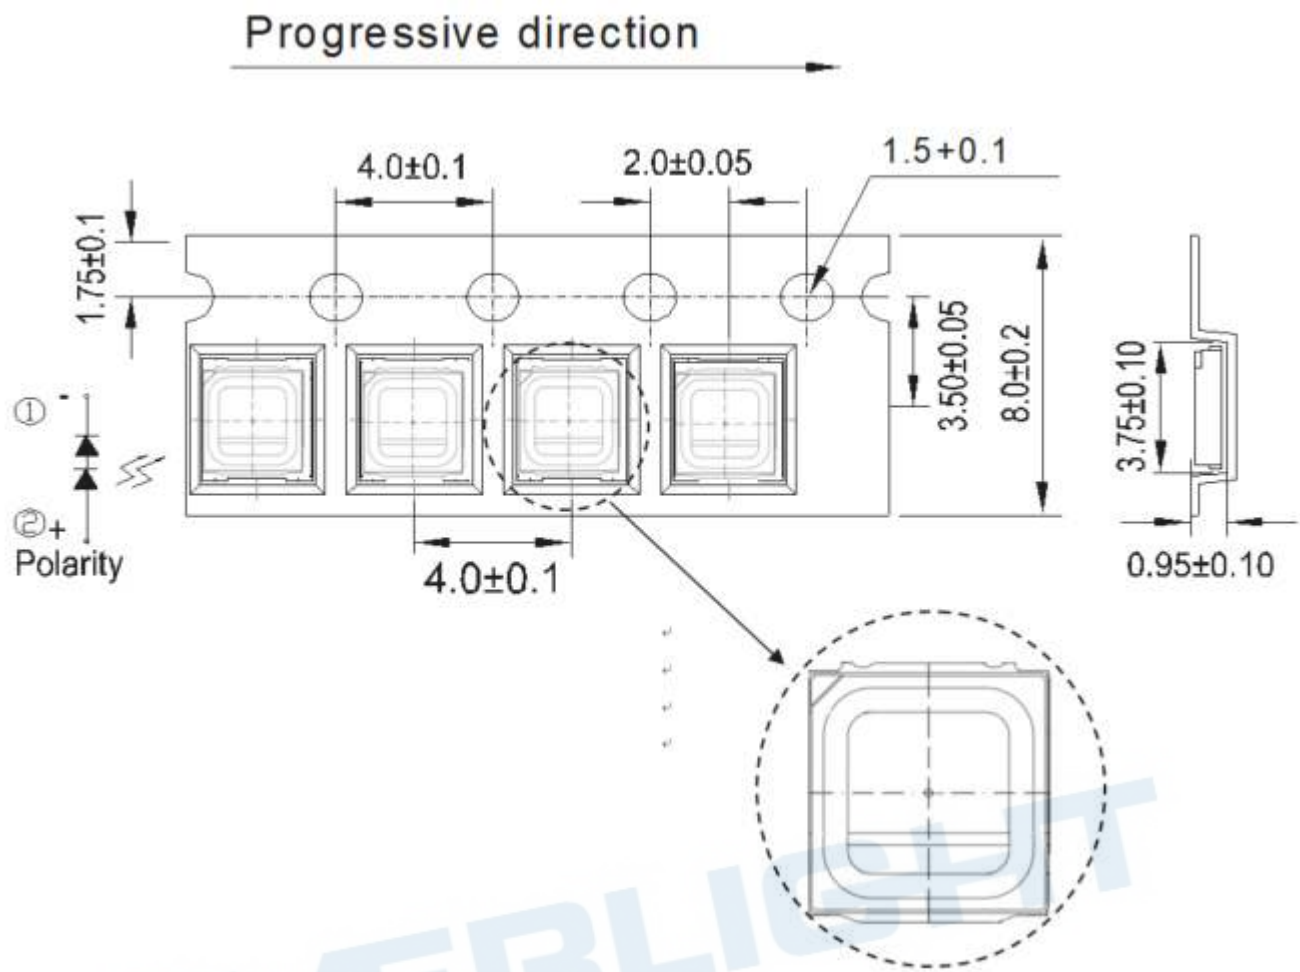

Note:

1. Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packing Process

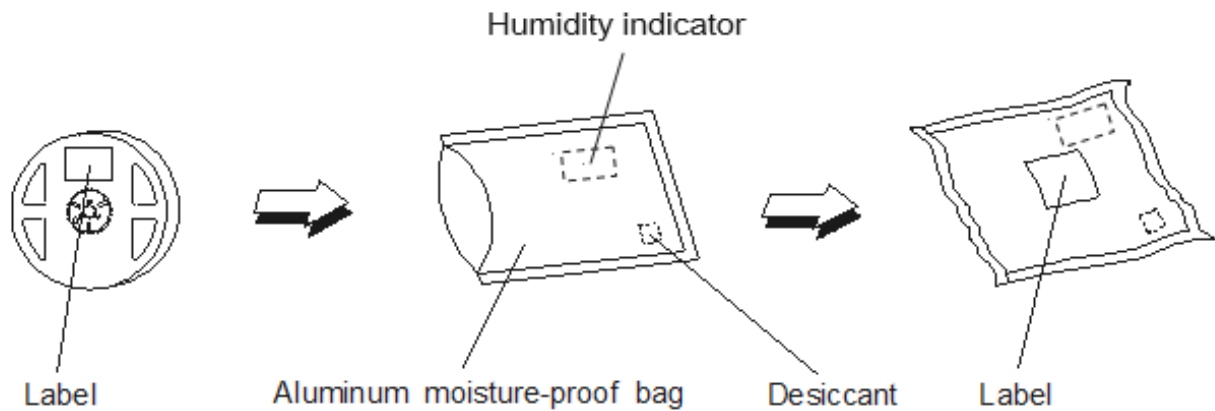

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Resistance to Solder Heat	Temp. : 260°C/10sec.	3 Times.	8 PCS.	0/1
2	Temperature Cycle	-40°C~100°C / Dwell time 30min	200 Cycles	8 PCS.	0/1
3	High Temperature/Humidity Life	Ta=85°C,85%RH, I _F = 100mA	1000 Hrs.	8 PCS.	0/1
4	Low Temperature Life	Ta=-40°C, I _F = 180 mA	1000 Hrs.	8 PCS.	0/1
5	High Temperature Life	Ta=60°C, I _F =170 mA	3000 Hrs.	8 PCS.	0/1
6	High Temperature Life	Ta=85°C, I _F =100 mA	3000 Hrs.	8 PCS.	0/1
7	Pulse	ON 30ms / OFF 2500ms	30000 CYCLES	8 PCS.	0/1
8	Thermal Shock	H : +100°C 20min └ 10 sec L : -40°C 20min	200 Cycles	8 PCS.	0/1
9	Power Temperature Cycle	H : +100°C 15min └ 5 min L : -40°C 15min I _F = 120 mA	200 Cycles	8 PCS.	0/1

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

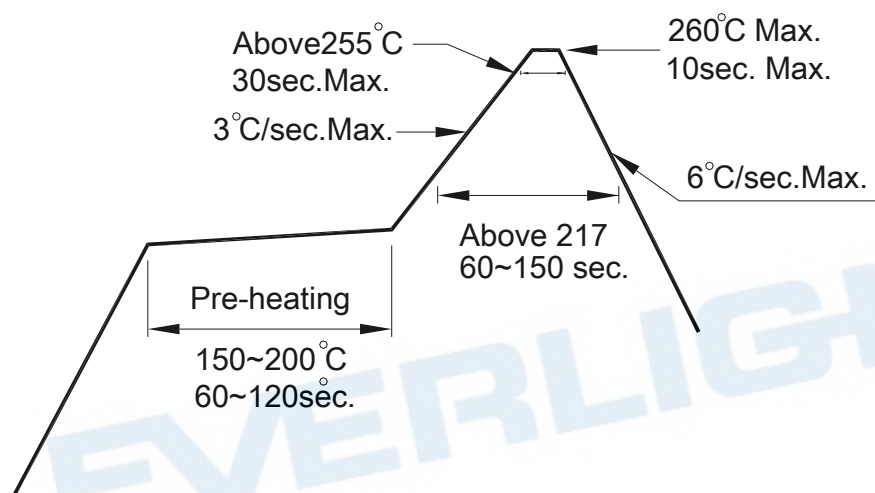

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

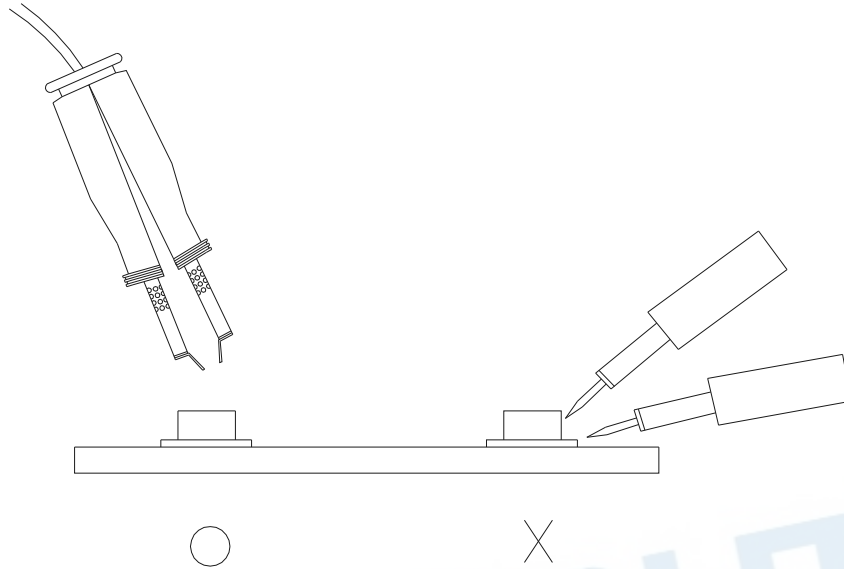

DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical,

EVERLIGHT