



Through Hole Lamp  
Product Data Sheet  
**LTLMR4TBTV3DA**

Spec No. :DS20-2019-0126  
Effective Date: 10/25/2023  
Revision: B

**LITE-ON DCC**

**RELEASE**

Surface Mount Lamp  
 LTLMR4TBTM3DA

## Surface Mount Lamp

[LTLMR4TBTM3DA](#)

<u>Rev</u>	<u>Description</u>	<u>By</u>	<u>Date</u>
P001	Preliminary DS	Perry	05/28/2019
A001	Update reflow soldering profile	Norah	3/29/2022
Above data for PD and Customer tracking only			
-	Upload DS to system	Perry	12/26/2019
A	Update outline dimension and IV spec	Apisit	10/12/2021
B	Update reflow soldering profile & packing spec.	Norah	10/19/2023

# Surface Mount Lamp

## LTLMR4TBTM3DA

### 1. Description

LiteON surface mount lamp is a high brightness LED in the form of surface mount device. It can be using common SMT assembly processes and compatible with industrial reflow soldering processes. Surface mount lamp LEDs are offered in round and oval lens packages which are suitable for sign board applications with smooth radiation pattern, especially narrow viewing angle control without adding optical lens which compare with standard SMD or PLCC. Advanced epoxy technology has a good moisture resistance and UV protection to be used in package.


#### 1.1. Features

- High Luminous intensity output.
- Low power consumption & High efficiency.
- Superior resistance to moisture
- Lead free & Halogen free & RoHS Compliant
- Blue InGaN 470nm Lamp, Blue Diffused package.
- Typical viewing angle 35°
- MSL3

#### 1.2. Applications

- Video message sign
- Traffic sign
- Message sign

### 2. Outline Dimensions

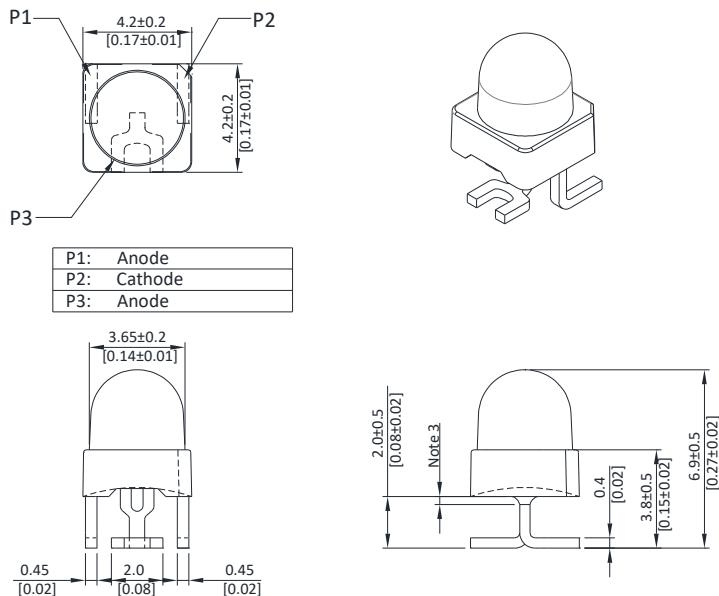

#### Notes :

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

## Surface Mount Lamp LTLMR4TBTM3DA

### 3. Absolute Maximum Ratings at TA=25°C

Parameter	Maximum Rating	Unit
Power Dissipation	85	mW
Peak Forward Current (Duty Cycle $\leq 1/10$ , Pulse Width $\leq 10\mu s$ )	100	mA
DC Forward Current	25	mA
Derating Linear From 45°C	0.62	mA/°C
Operating Temperature Range	-40°C to + 85°C	
Storage Temperature Range	-40°C to + 100°C	
Reflow Soldering Condition	260°C for 10 Seconds Max.	

### 4. Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	IV	3200		7200	mcd	IF = 20mA Note 1,5
Viewing Angle	2θ1/2	30	35		deg	Note 2,7 (Fig.6)
Peak Emission Wavelength	λP		464		nm	Measurement @Peak (Fig.1)
Dominant Wavelength	λd	460		480	nm	Note 4
Spectral Line Half-Width	Δλ		25		nm	
Forward Voltage	VF	2.5		3.5	V	IF = 20mA
Reverse Current	IR			10	μA	VR = 5V

#### NOTE:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. θ1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. Iv classification code is marked on each packing bag.
4. The dominant wavelength, λd is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
5. Iv guarantee must be included with ±15% testing tolerance.
6. Reverse voltage (VR) condition is applied for IR test only. The device is not designed for reverse operation.
7. View angle measurement is ±2 degree tolerance.

## Surface Mount Lamp LTLMR4TBTM3DA

### 5. Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

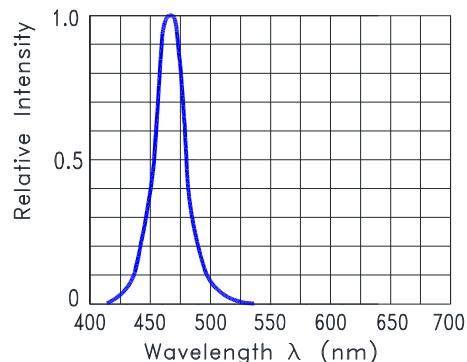


Fig.1 Relative Intensity VS.  
Wavelength

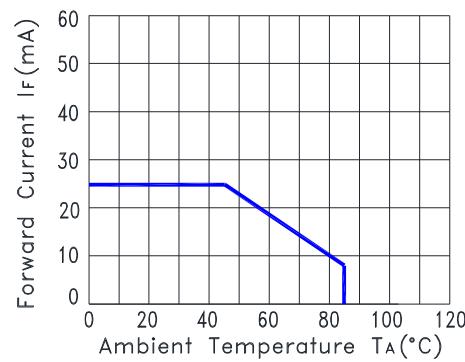


Fig.2 Forward Current  
Derating Curve

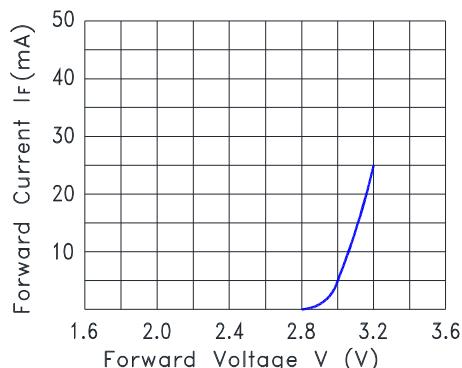


Fig.3 Forward Current vs.  
Forward Voltage

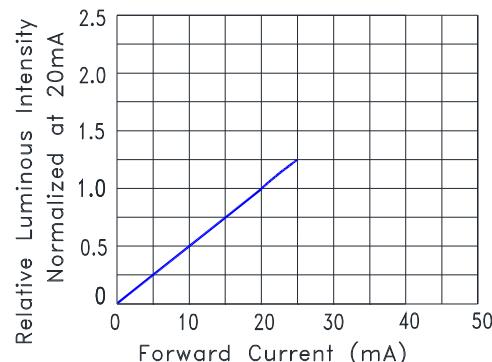


Fig.4 Relative Luminous Intensity  
vs. Forward Current

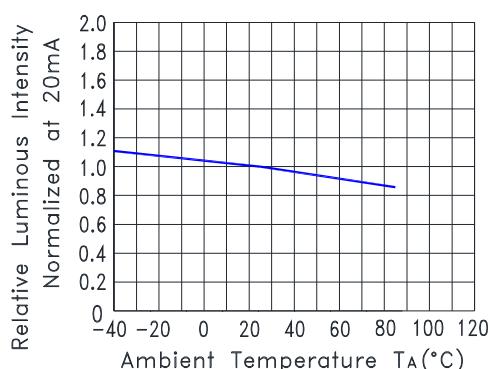


Fig.5 Relative Luminous Intensity  
VS. Ambient Temperature


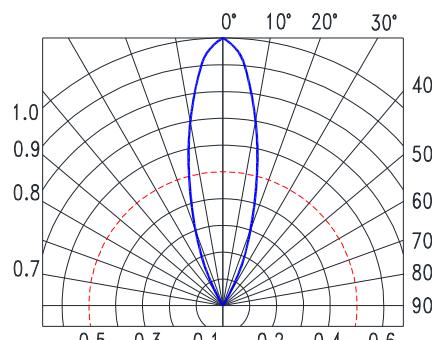


Fig.6 Spatial Distribution


## Surface Mount Lamp LTLMR4TBTM3DA

### 6. Packing Spec.

#### Packing Carrier Tape Dimensions

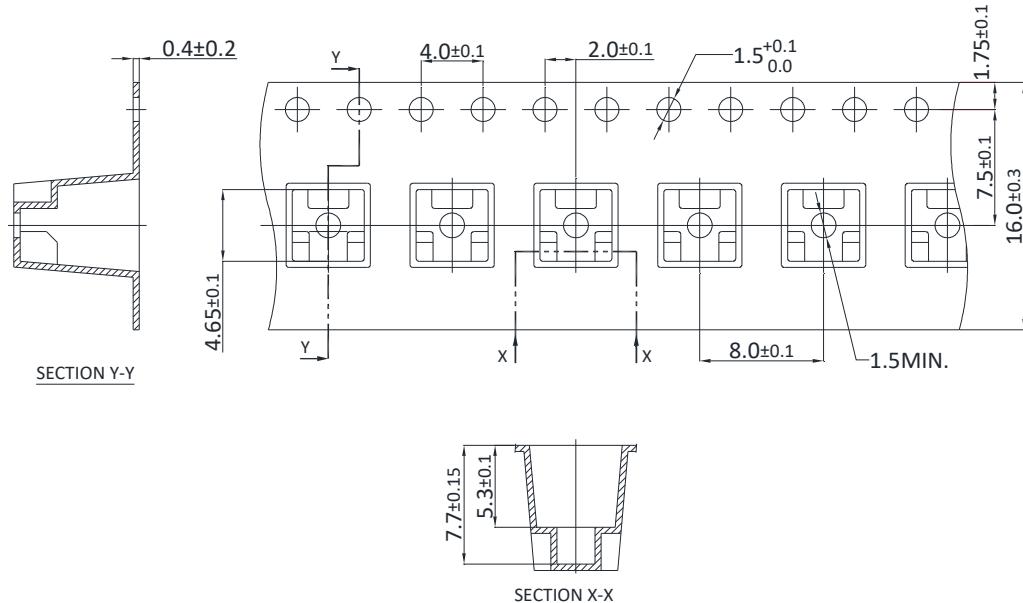

Total 1,000pcs per packing reel

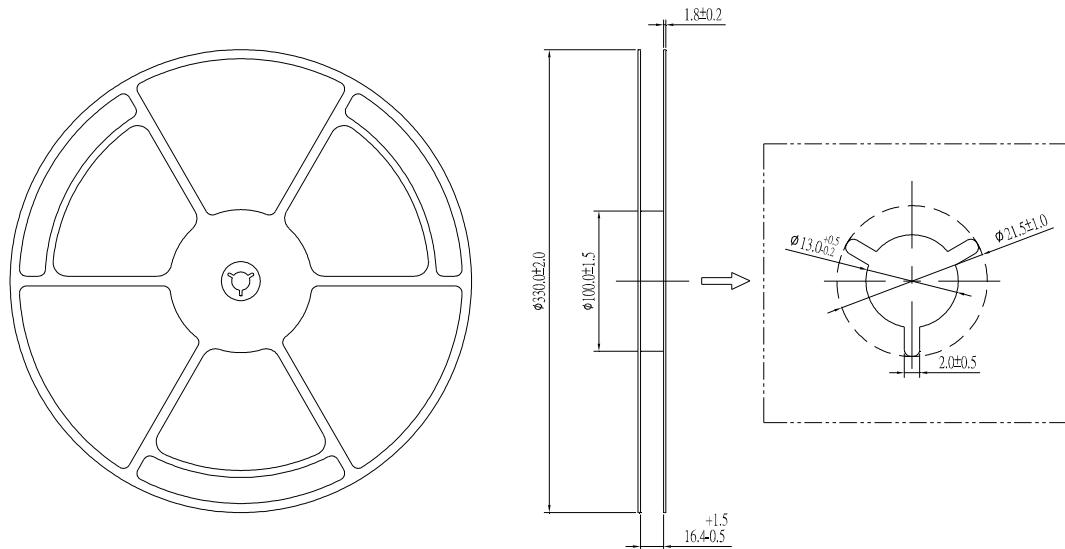

#### Notes :


1. All dimensions are in millimeters.

## Surface Mount Lamp LTLMR4TBTM3DA

1 reel with humidity indicator card and desiccant per moisture barrier bag

3 moisture barrier bags per inner carton

Total 3,000pcs per inner carton




INNER CARTON

361 x 358 x 75 mm

10 Inner cartons per outer carton

Total 30,000pcs per outer carton

In every shipping lot, only the last pack will be non-full packing

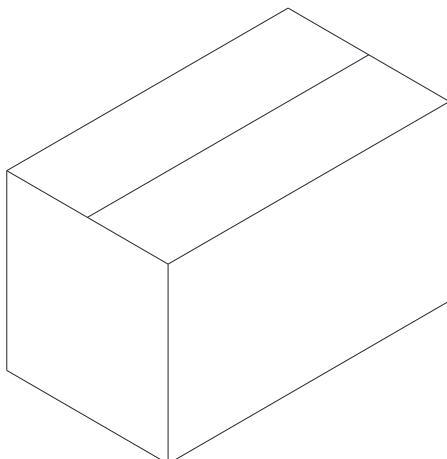

OUTER CARTON

740 x 390 x 395 mm

Surface Mount Lamp  
 LTLMR4TBTM3DA

## 7. Bin Table Specification

Luminous Intensity Iv (mcd) IF@20mA		
Bin Code	Min.	Max.
U	3200	4200
V	4200	5500
W	5500	7200

Note: Tolerance of each bin limit is  $\pm 15\%$

Dominant Wavelength Wd (nm) IF@20mA		
Bin Code	Min	Max
B1	460	464
B2	464	468
B3	468	472
B4	472	476
B5	476	480

Note: Tolerance of each bin limit is  $\pm 1\text{nm}$

## Surface Mount Lamp LTLMR4TBTM3DA

### 8. CAUTIONS

#### 8.1. Application

This LED lamp is good for application of indoor and outdoor sign, also ordinary electronic equipment.

#### 8.2. Storage

The product is Moisture Sensitive Level 3, refer to JEDEC J-STD-020. The LEDs in a sealed moisture barrier bag can be stored at  $< 30^{\circ}\text{C}$  and 90% RH (relative humidity) for 12 months. If the actual shelf life has exceeded 12 months and the humidity indicator card indicates that baking is not required, it is safe to reflow the LEDs per the original MSL rating. After opening the moisture barrier bag, keep the LEDs under  $< 30^{\circ}\text{C}$  and 60% RH at all time and complete soldering or other high temperature process within 168 hours.

Baking is required, once LEDs are stored out of original packaging with

- The humidity indicator card indicates  $>10\%$  RH.
- Floor life over 168hrs.
- Exposed to  $> 30^{\circ}\text{C}$  and 60% RH.

The recommended baking condition is  $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$  for 20 hours and baking should only be done once.

If LEDs are exposed in ambient environments for too long, the silver plating on lead might be oxidized and affecting its solderability. Unused remaining LEDs should be stored with silica gel desiccants in a sealed moisture barrier bag.

#### 8.3. Cleaning


Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

#### 8.4. Soldering

Recommended soldering conditions:

Reflow soldering		Soldering iron	
Preheat/Soak Temperature Min. ( $T_{smin}$ )	$150^{\circ}\text{C}$	Temperature	$315^{\circ}\text{C}$ Max.
Preheat/Soak Temperature Max. ( $T_{smax}$ )	$200^{\circ}\text{C}$	Soldering time	3 sec. Max.
Preheat/Soak Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	120 seconds Max.		(one time only)
Liquidous temperature ( $T_L$ )	$217^{\circ}\text{C}$		
Time ( $t_L$ ) maintained above $T_L$	60~150 seconds		
Peak temperature ( $T_P$ )*	$260^{\circ}\text{C}$		
Specified classification temperature ( $T_c$ )	$255^{\circ}\text{C}$		
Time ( $t_P$ ) within $5^{\circ}\text{C}$ of the temperature $T_c$	30 seconds Max.		
Time $25^{\circ}\text{C}$ to peak temperature	5 minutes Max.		


Recommended lead free reflow soldering profile:

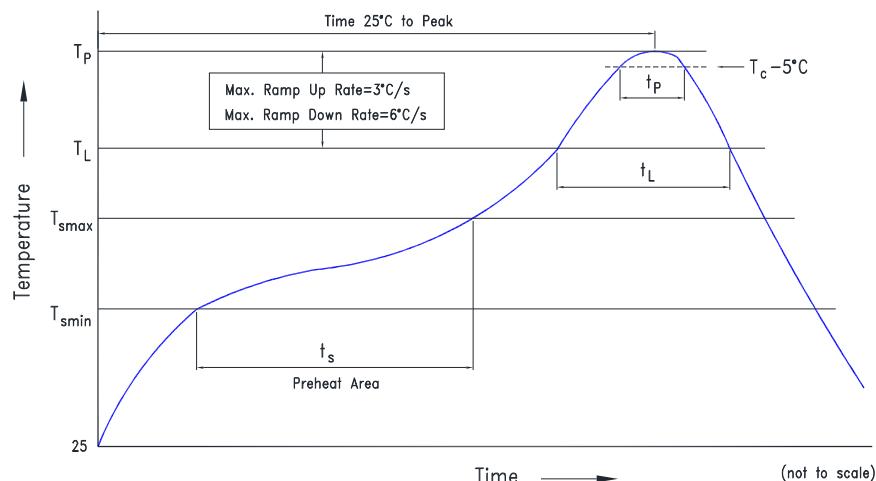

# Surface Mount Lamp

## LTLMR4TBTM3DA

Recommended soldering pad pattern:

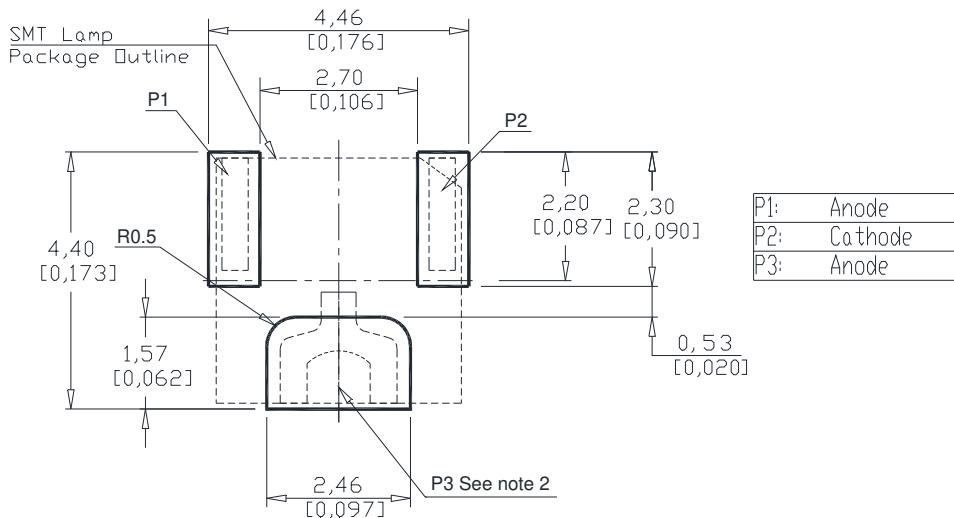


Notes:

1. This LED is designed to be reflow soldered on PCB and not suitable for dip soldered.
2. This Pad is recommend to connect to heat sink or any cooling mechanisms as its design to distribute heat while operating.
3. Reflow soldering must not be done more than two times and hand soldering must not to be done more than one time.
4. Do not apply any external stress to the LED during soldering while the LED is at high temperature.
5. Avoid rapid cooling LED from the peak temperature.


### 8.6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

**Circuit model (A)**



**Circuit model (B)**

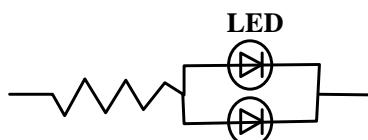

(A) Recommended circuit

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

### 8.7. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

#### Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti- electrostatic glove when handling these LEDs
- All devices, equipment, and machinery must be properly grounded
- Work tables, storage racks, etc. should be properly grounded
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handling

## Surface Mount Lamp LTLMR4TBTM3DA

### Suggested checking list:

#### Training and Certification

- 8.7.1.1. Everyone working in a static-safe area is ESD-certified?
- 8.7.1.2. Training records kept and re-certification dates monitored?

#### Static-Safe Workstation & Work Areas

- 8.7.2.1. Static-safe workstation or work-areas have ESD signs?
- 8.7.2.2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 8.7.2.3. All ionizer activated, positioned towards the units?
- 8.7.2.4. Each work surface mats grounding is good?

#### Personnel Grounding

- 8.7.3.1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
- 8.7.3.1. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 8.7.3.2. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
- 8.7.3.3. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 8.7.3.4. All wrist strap or heel strap checkers calibration up to date?

Note: \*50V for Blue LED.

#### Device Handling

- 8.7.4.1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 8.7.4.2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 8.7.4.3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 8.7.4.4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

#### Others

- 8.7.5.1. Audit result reported to entity ESD control coordinator?
- 8.7.5.2. Corrective action from previous audits completed?
- 8.7.5.3. Are audit records complete and on file?

## 9. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.